OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

HONSBERG - FW1 SERIES FLOW SWITCH

Piston

FW1-015GP006
Flow switch.plastic 1-6 l/min,G1/2



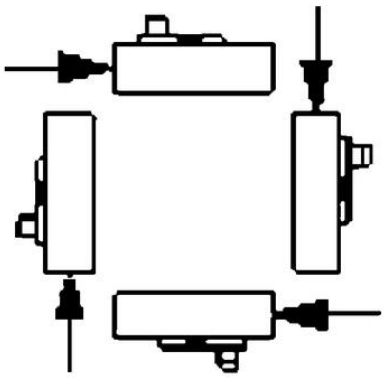
- Switching Range 1..11 l/min H²O
- Water (Oil available on request)
- G¼" up tp G1"
- Brass or POM Wetted Parts
- Max Pressure 10 bar

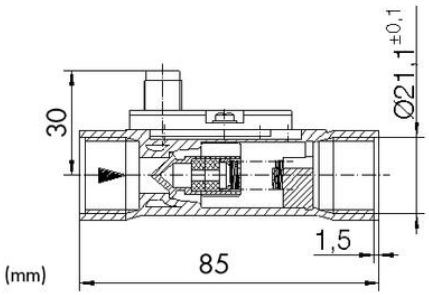
PRODUCT DESCRIPTION

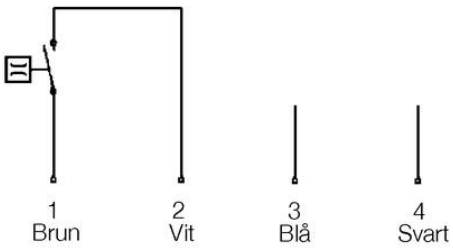
Mechanical flow switch, for fluid media, with spring-supported piston and magnetic triggering of a reed switch. Robust construction in brass and POM

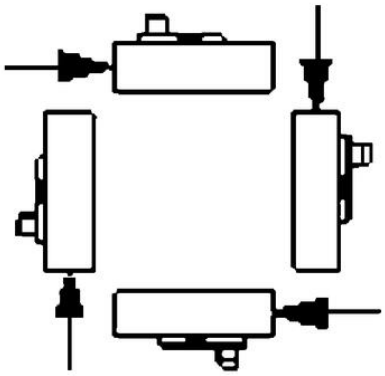
TECHNICAL DATA

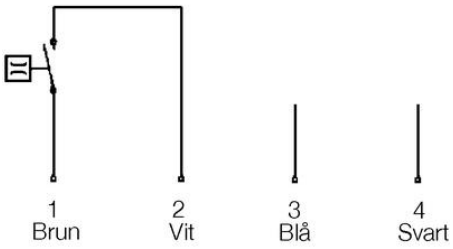
Connection type	Internal thread, G ½ "
Contact rating max	0.5 A
Electrical connection	M12x1, 4-pole
Flow max	20 l/min
Flow range max	6 l/min
Flow range min	1 l/min
Function	Flask, reed contact, ending
IP class	IP67
Material of body	POM
Material spring	Stainless steel 301
Pressure drop	0.8 bar at maximum flow
Pressure range max	10 bar
Temperature of media to	90 °C
Type of flow component	Flow Switches
Voltage ac max	230 V
Weight	0.05 kg




30
Ø21,1±0,1
1,5
85
(mm)


1
Brun
2
Vit
3
Blå
4
Svart




1
Brun
2
Vit
3
Blå
4
Svart