

HONSBERG - WO1 SERIES FLOW INDICATOR

Sight Glass

WO1-032GM
150l/min, G1 1/4, Brass

- G 1/4 - 151l/min - G1 1/2 - 220l/min
- Water , Oils
- DN-8-G 1/4 - DN40-G1 1/2
- Brass / Stainless Steel
- 16 Bar max




PRODUCT DESCRIPTION

TECHNICAL DATA

Connection type	G1 1/4 FEMALE
Flow range max	150 l/min
Flow range min	0 l/min
Material of connection	Brass
Material of glass tube	Borosilicate glass
Material of seals	NBR
Material wipers	NBR
Media	WATER, OILS
Pressure range max	16 bar
Temperature of media from	-20 °C
Temperature of media to	100 °C
Weight	1.5 kg

G	Types	L	SW	X	Weight kg
G 1/4	WO1-008G.	71	36	9	0.3
G 3/8	WO1-010G.				
G 1/2	WO1-015G.	86	46	13	0.6
G 3/4	WO1-020G.	94		16	
G 1	WO1-025G.	104			
G 1 1/4	WO1-032G.	120	65	19	1.5
G 1 1/2	WO1-040G.	130		20	1.6

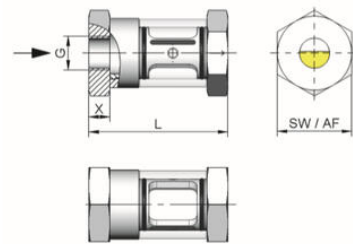

G	Types	L	SW	X	Weight kg
G 1/4	WO1-008G.	71	36	9	0.3
G 3/8	WO1-010G.				
G 1/2	WO1-015G.	86	46	13	0.6
G 3/4	WO1-020G.	94		16	
G 1	WO1-025G.	104			
G 1 1/4	WO1-032G.	120	65	19	1.5
G 1 1/2	WO1-040G.	130		20	1.6

