OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

WEST - P6010 AND P8010 PANEL INDICATOR

P6010319102010
WEST 48x48 IND DC 2R 1DR 24V



- Jumperless configuration
- Auto detected hardware
- Up to 4 alarm outputs
- Modbus and ASCII comms

PRODUCT DESCRIPTION

The 6010 and 8010 have multi-point scaling, tare function and improved flexibility.
They have a universal input and are available with a red of green display.
Plug-in modules allow up to four alarm relays (latching or non-latching), PV retransmission or transmitter PSU.

TECHNICAL DATA

TECHNICAL DATA

Dimensions	48x48
Input type	Universal (TC, RTD, DC linear mA/mV)
Output 1	Relay
Output 2	Relay
Output 3	Relay
Supply voltage	24-48 V AC/DC
Communication	N/A
Additional features	N/A
Display colour	Red
IP class front	IP65
IP class	IP20

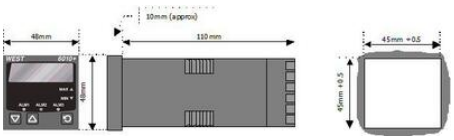

OPTION 3
Transmitter PSU
N/C C N/O Relay
DC or SSR Drive
TOP
Not used
Digital Input
100-240V 50/60Hz L N
20-48V 50/60Hz
22-65VDC
POWER INPUT
OPTION A
B A RS485 Comms
DC or SSR Drive
Triac
Relay N/O C N/C
OPTION 1
UNIVERSAL INPUT
RTD
Thermocouple
Linear V/mV
Linear mA
DC or SSR Drive
Triac
N/O C N/C Relay
OP2 - N/O C N/O - OP4 Dual Relay
OPTION 2