

CROUZET SWITCHES - SERIES 83870 WITH EMBEDDED CABLE

83874101
 METAL PLUNGER THREADED BARREL


- IP66 & IP67
- Housing made entirely from metal
- Forced breaking contacts
- cUL approved



PRODUCT DESCRIPTION

TECHNICAL DATA

Approvals	UL 50, UL 508
Cable	0,75 mm ²
Cable length	1000 mm
Contact type	1 x N/O, 1 x N/C
Conventional thermal current	10 A
IP class	IP66, IP67, IP69
Power min	0.1 A
Rated current at 250 V ac	3 A
Temperature operational max	70 °C
Temperature operational min	-25 °C
Voltage ac max	250 V
Voltage min	10 V

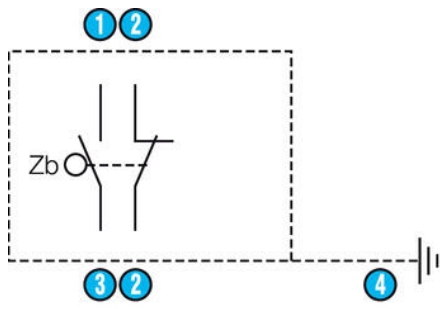

- 1 Brown
- 2 Black
- 3 Blue
- 4 Green-Yellow

