
OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

CROUZET SWITCHES - 83132 DOUBLE BREAKING MINIATURE

83132030
831320 D/BRK W2

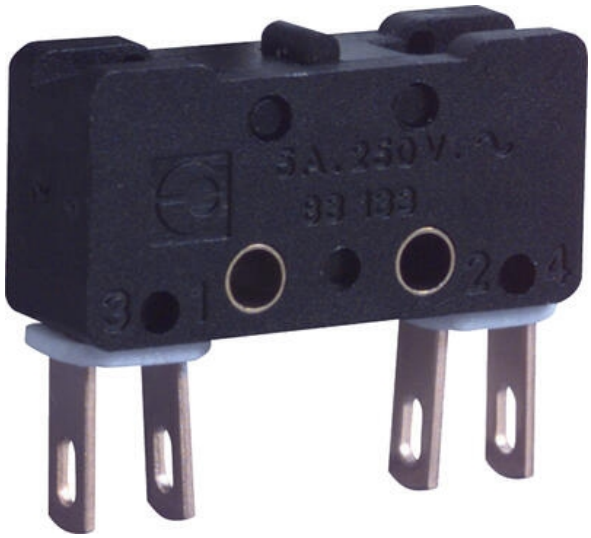


- Double breaking function/two-pole microswitch
- Connections in three different directions
- Option of actuating several switches in the same control movement


PRODUCT DESCRIPTION


TECHNICAL DATA


Connection	W2
Contact gap	0,3 x 2 mm
Contact type	1 x N/O, 1 x N/C
Force of the return movement min	0.4 N
Hysteresis max	0.45 mm
IP class	IP40
Operating force max	1.6 N
Overtravel min	0.27 mm
Permissible overvoltage max	10 N
Rated current at 250 V ac	6 A
Sleep max	8.45 mm
Switching point	7,7±0,2 mm
Temperature operational max	125 °C
Temperature operational min	-40 °C
Thermal current at 250 V ac	10 A

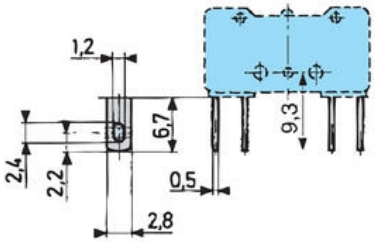


83 132 0

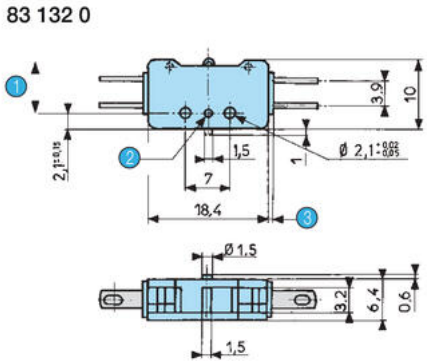


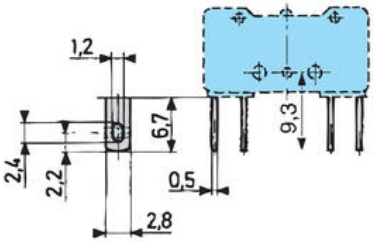

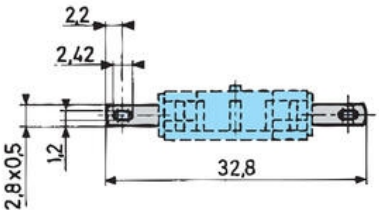


1 OL = 7.4
2 Ø1.5 depth 0.7
3 2 plates 0.8

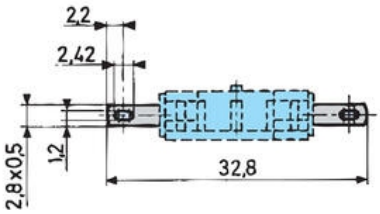


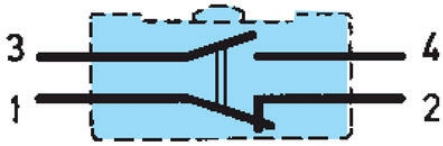

83 133 0

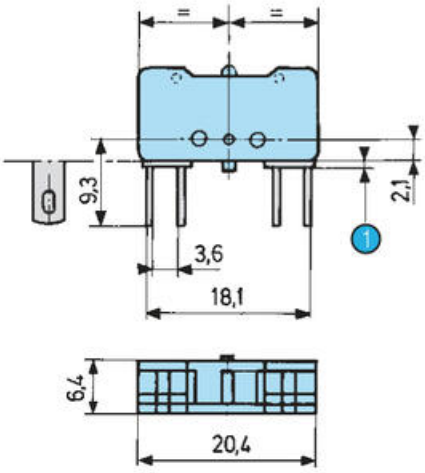


54E

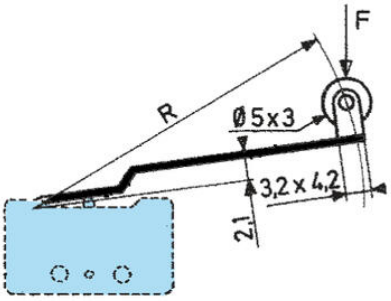


1 2 plates 0.8

54A

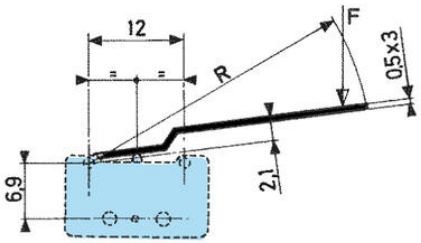



Operating curve for type
83 132 0 - 83 133 0 - 83 134 0





1 Number of cycles
2 Resistive load
3 Inductive load
4 Mechanical life
5 Current (A)

83 134 0

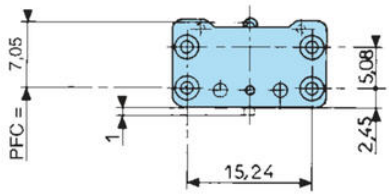


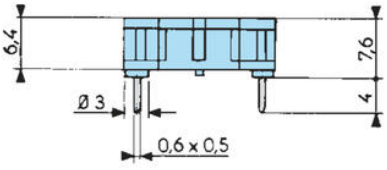

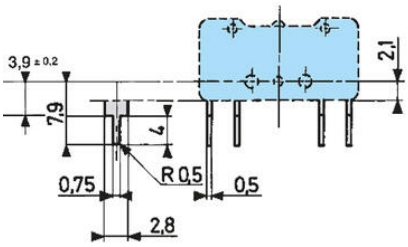


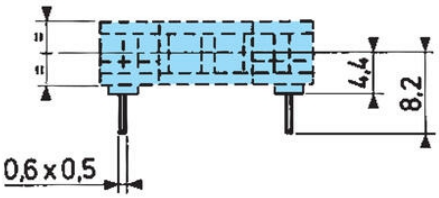


54B

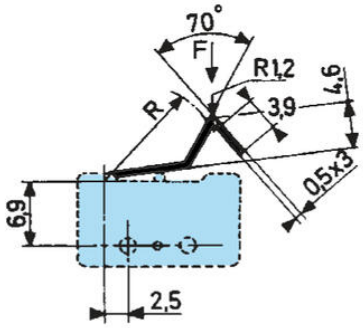


54A2

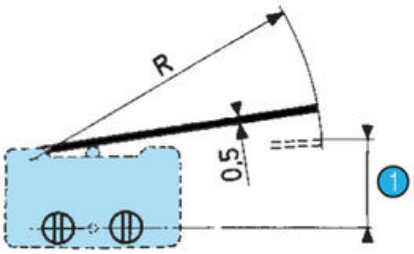


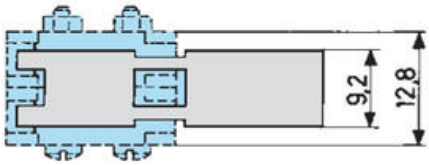

54A3

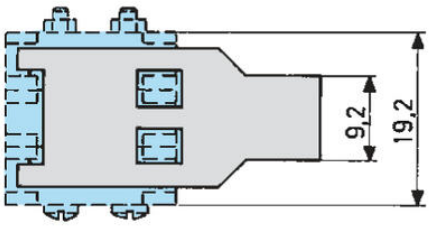


For 83 132 0 och 83 133 0




1 Case


1 Switching point


For 83 134 0




1 Case

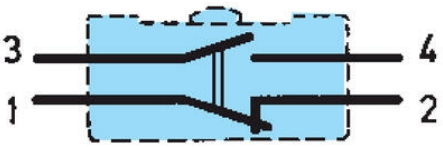

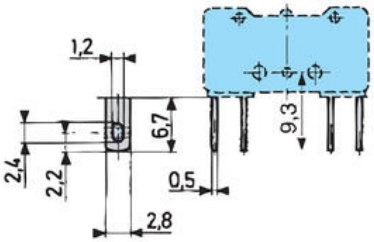

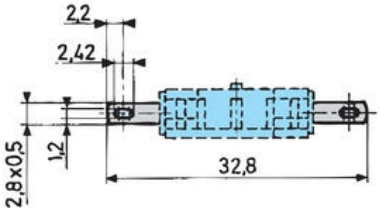


83 132 0

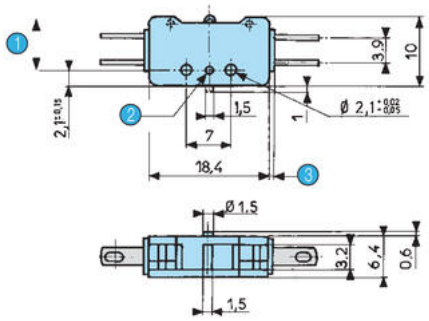


1 OL = 7.4
2 Ø1.5 depth 0.7
3 2 plates 0.8

83 133 0

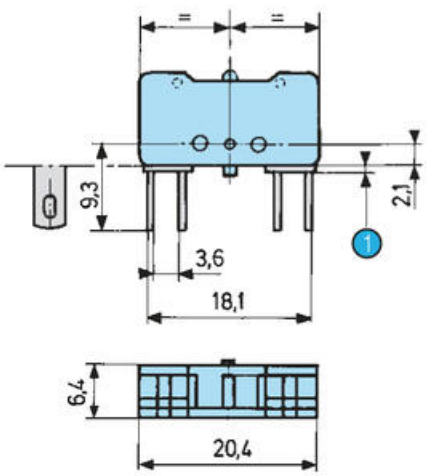


1 2 plates 0.8


54E

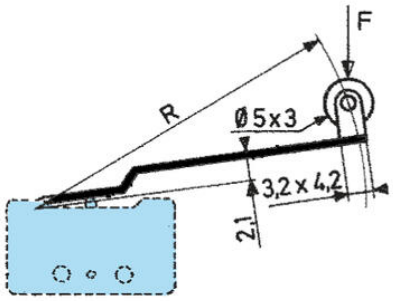

54A

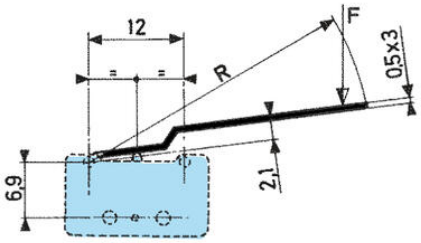



Operating curve for type
83 132 0 - 83 133 0 - 83 134 0




1 Number of cycles
2 Resistive load
3 Inductive load
4 Mechanical life
5 Current (A)


83 134 0

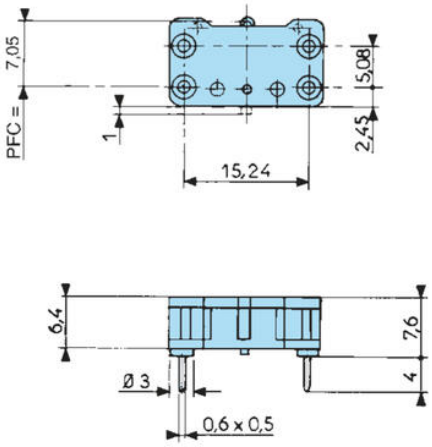

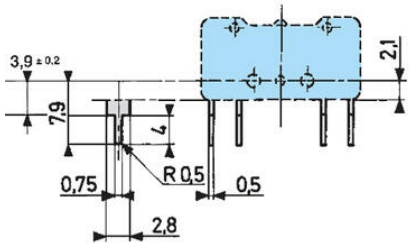


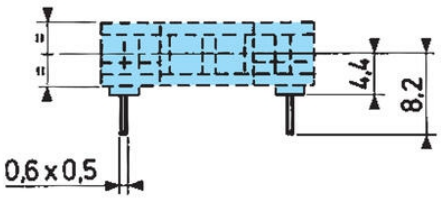


54B

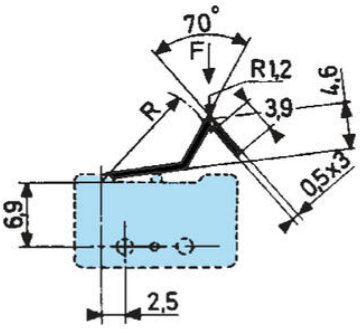


54A2

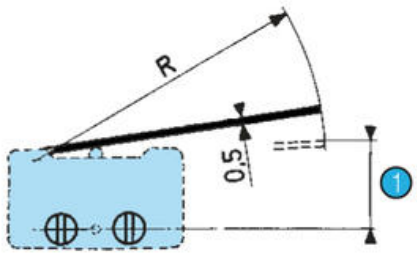

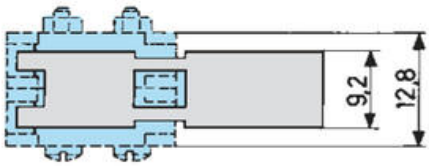


1 Switching point

54A3

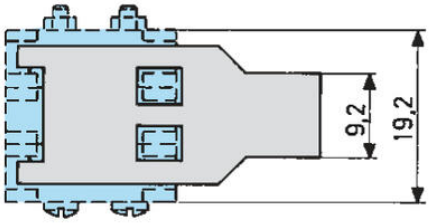


For 83 132 0 och 83 133 0



1 Case

For 83 134 0



1 Case