

CROUZET SWITCHES - V3

83161304

831613 C/O W6A5*


- Rated data 0.1 A to 20 A/250 V ac
- Operating temperature up to +125 °C
- Compliant with standards EN 61058 and UL 1054
- Four different control arm installation options








PRODUCT DESCRIPTION

TECHNICAL DATA


Connection	W6A5
Contact gap	0.4 mm
Contact type	Changeover (SPDT)
Force of the return movement min	0.2 N
Hysteresis max	0.35 mm
IP class	IP40
Operating force max	0.8 N
Operating power total max	2 N
Overtravel min	1.2 mm
Permissible overvoltage max	20 N
Rated current at 250 V ac	16 A
Sleep max	16.2 mm
Switching point	14,7±0,3 mm
Temperature operational max	125 °C
Temperature operational min	-60 °C
Thermal current at 250 V ac	20 A

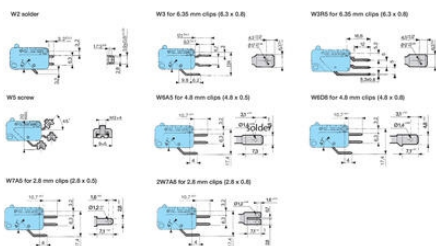


W6A5 für 4.8 mm clips (4.8 x 0.5)

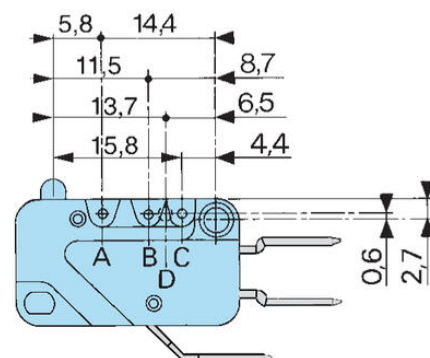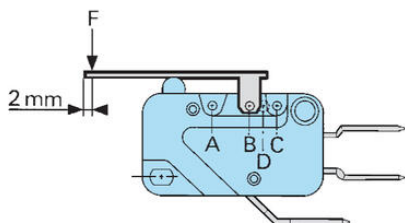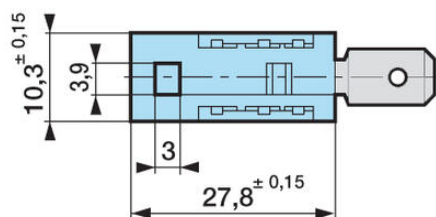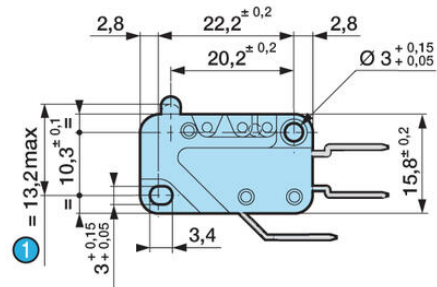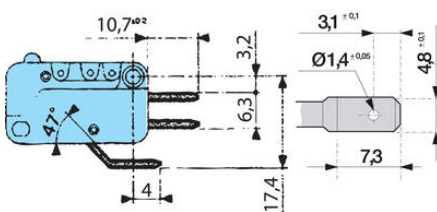


161 F

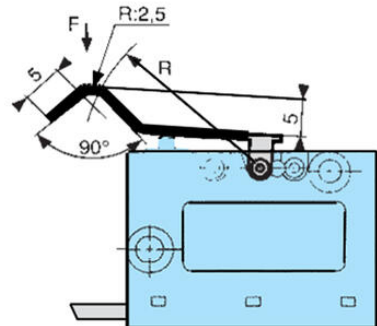






161 G




161 A

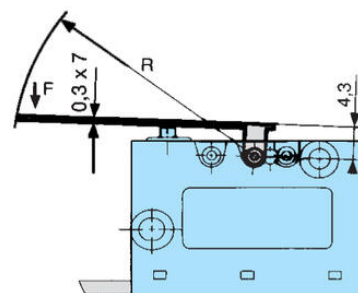


161 E

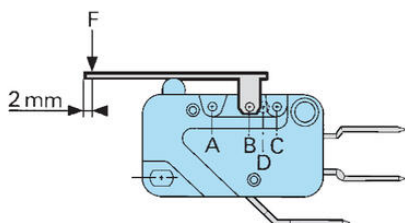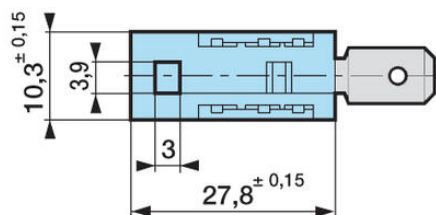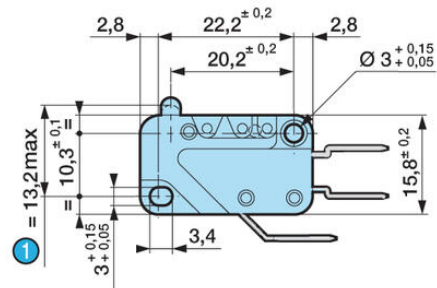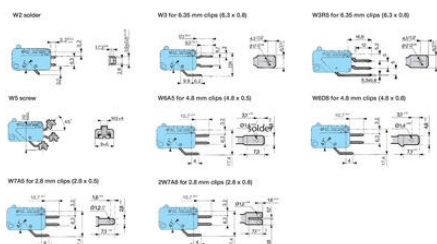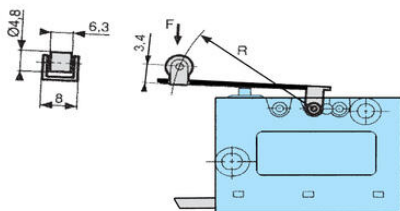


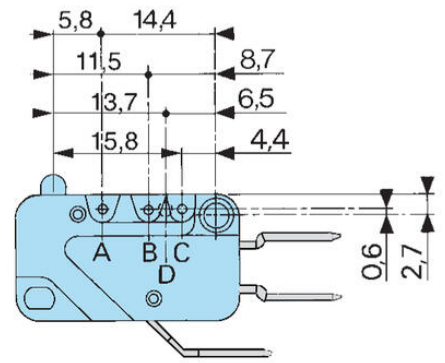


161 F

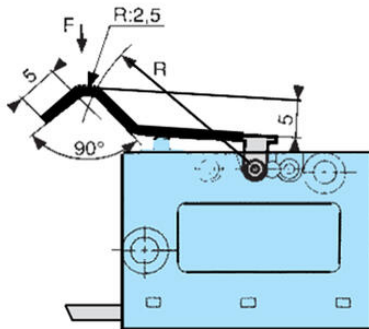

161 G



161 A

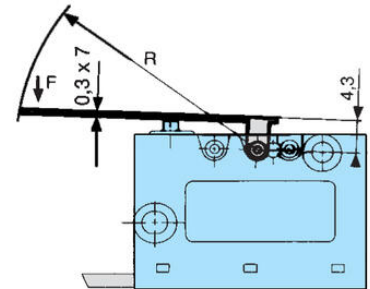

161 E

