


CROUZET SWITCHES - V4

83170008
831700 C/O X1


- Load 0.1-10 A 250 V ac
- Minimum load 1 mA 4 V dc
- Available with sponge trigger
- Control arm can be fitted in two different positions

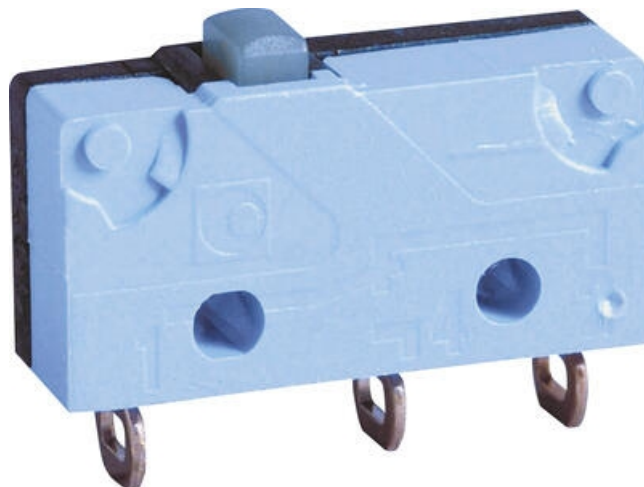


PRODUCT DESCRIPTION

TECHNICAL DATA


Connection	X1
Contact gap	0.4 mm
Contact type	Changeover (SPDT)
Force of the return movement min	0.3 N
Hysteresis max	0.15 mm
IP class	IP40
Operating force max	1.5 N
Operating power total max	1.8 N
Overtravel min	0.5 mm
Permissible overvoltage max	10 N
Rated current at 250 V ac	10 A
Sleep max	9.2 mm
Switching point	8,4 ±0,3 mm
Temperature operational max	125 °C
Temperature operational min	-40 °C
Thermal current at 250 V ac	12.5 A

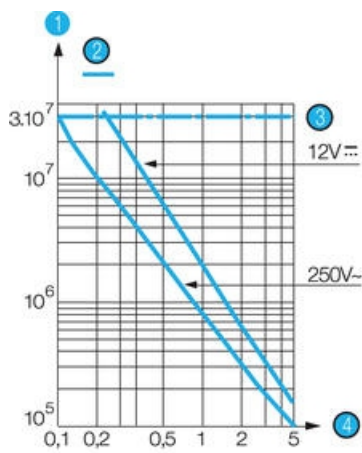

- 1 Number of cycles
- 2 Resistive load
- 3 Mechanical life
- 4 Current (A)

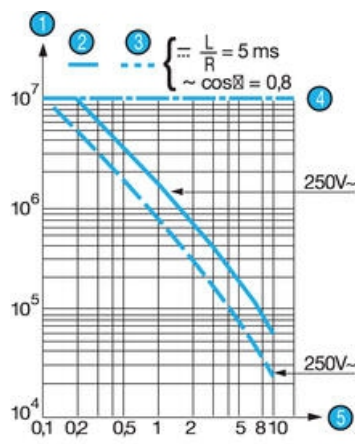

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

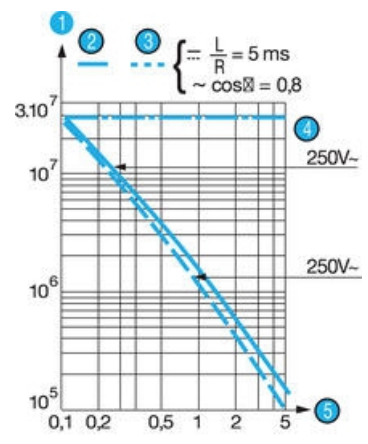

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

Electrical function Partially




Breaking




Conclusion



X1 - X1S

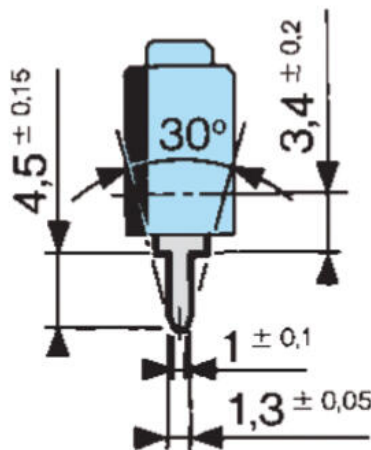


83 170 Asymmetric version

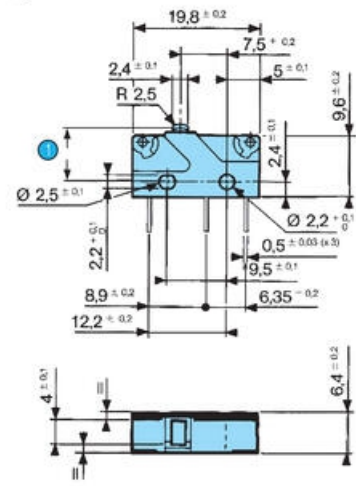


1 OL = 7.6


Mounted with M2 screws
Recommended tightening torque: 2 cm daN

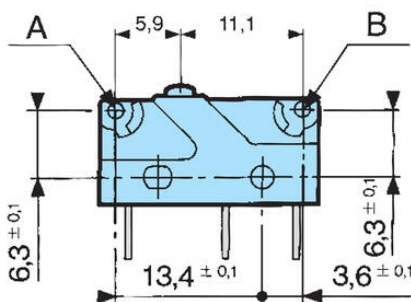


W2




W7A5




X1 - X1S




X2 - X2S





X3 - X3S



83 170 Symmetrical version


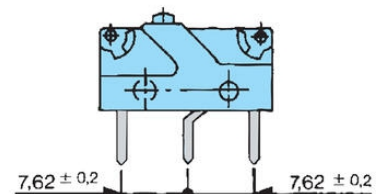


170 E
Arm with roll

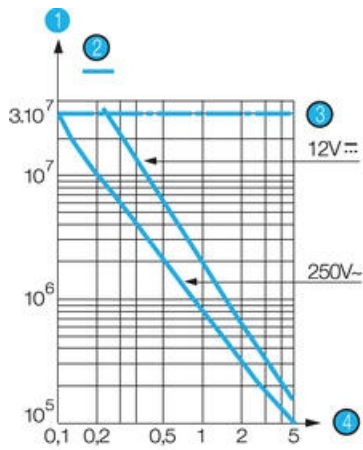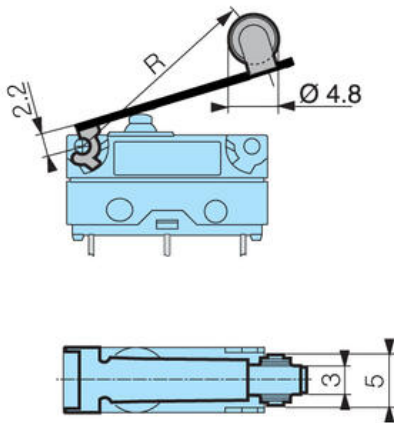



- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

170 A
Straight-arm

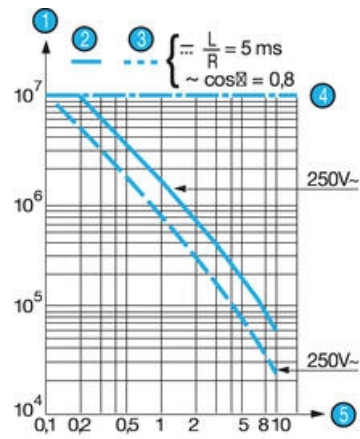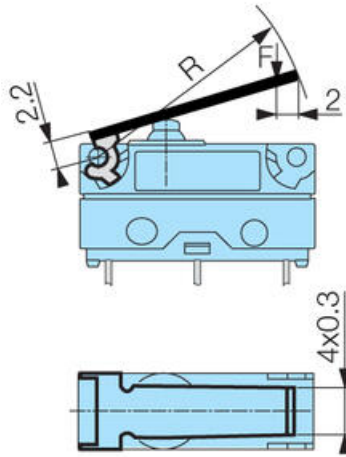

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

170 F
Arm with simulated scroll

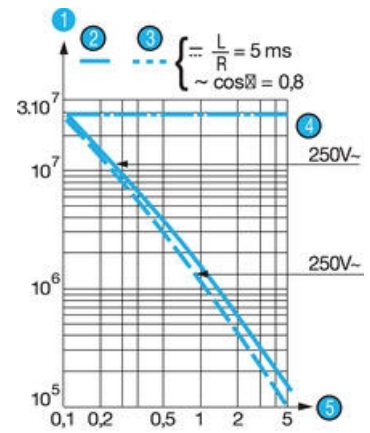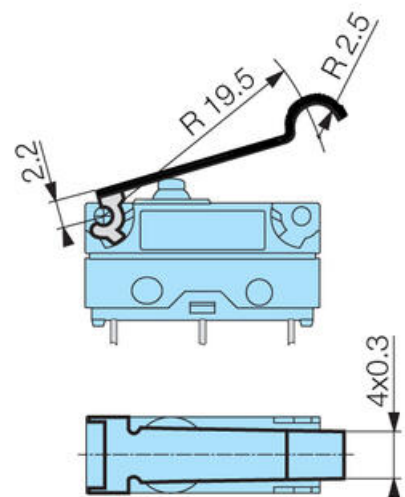

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

Electrical function

Partially




Breaking



Conclusion




83 170
Asymmetric version

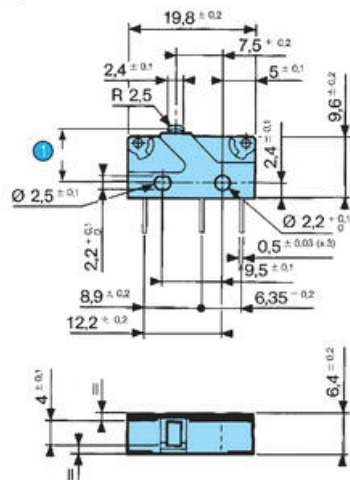


1 OL = 7.6


Mounted with M2 screws
Recommended tightening torque: 2 cm daN

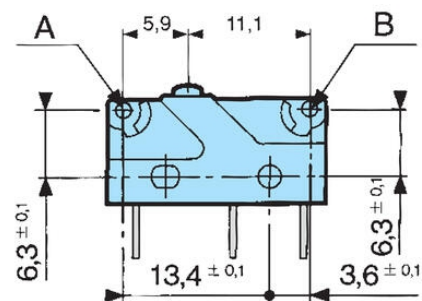


W2




W7A5




X1 - X1S




83 170 Symmetrical version

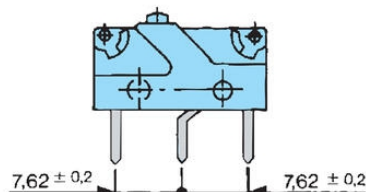



X2 - X2S




X3 - X3S



170 E
Arm with roll

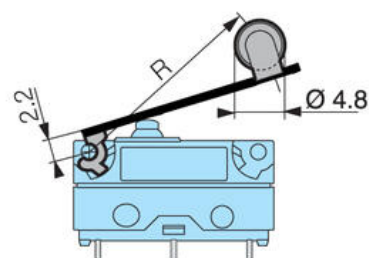

170 A
Straight-arm

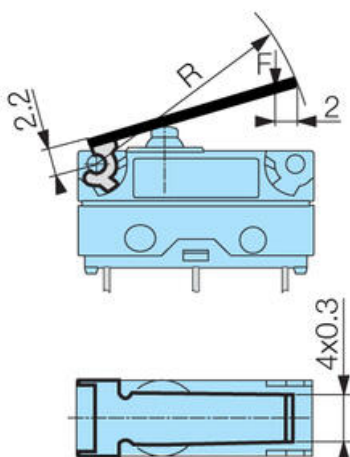

170 F
Arm with simulated scroll

