


CROUZET SWITCHES - V4

83170902
831709 CO W2


- Load 0.1-10 A 250 V ac
- Minimum load 1 mA 4 V dc
- Available with sponge trigger
- Control arm can be fitted in two different positions

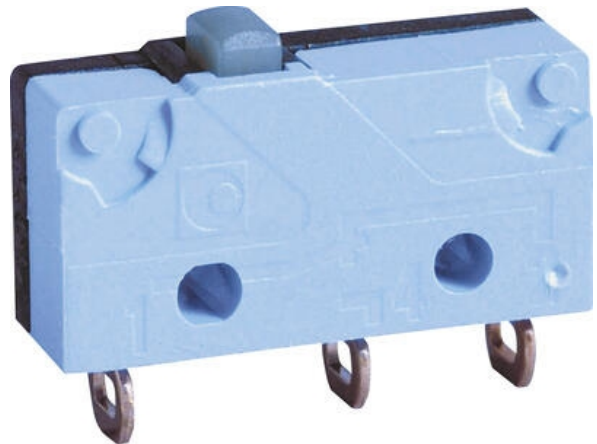


PRODUCT DESCRIPTION

TECHNICAL DATA


Connection	W2
Contact gap	0.4 mm
Contact type	Changeover (SPDT)
Force of the return movement min	0.1 N
Hysteresis max	0.15 mm
IP class	IP40
Operating force max	0.6 N
Operating power total max	1 N
Overtravel min	0.5 mm
Permissible overvoltage max	10 N
Power min	0.001 A
Rated current at 250 V ac	5 A
Sleep max	9.2 mm
Switching point	8,4 ±0,3 mm
Temperature operational max	125 °C
Temperature operational min	-40 °C
Thermal current at 250 V ac	6 A
Voltage ac max	250 V
Voltage min	4 V

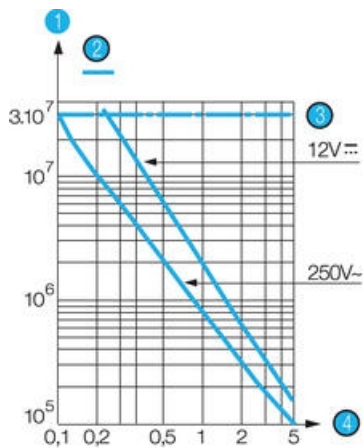

- 1 Number of cycles
- 2 Resistive load
- 3 Mechanical life
- 4 Current (A)

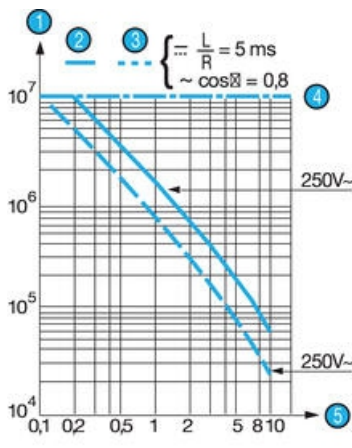

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

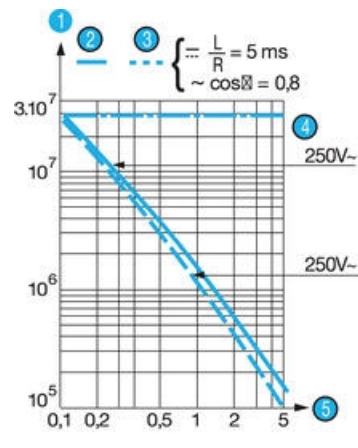

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

Electrical function

Partially




Breaking




Conclusion



W2

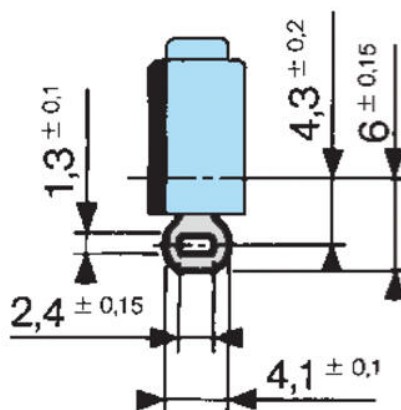


83 170 Asymmetric version

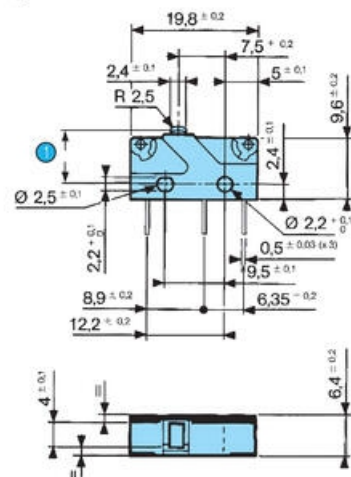


1 OL = 7.6


Mounted with M2 screws
Recommended tightening torque: 2 cm daN

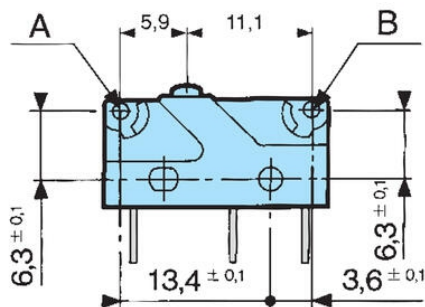


W2




W7A5




X1 - X1S




X2 - X2S




X3 - X3S




83 170 Symmetrical version

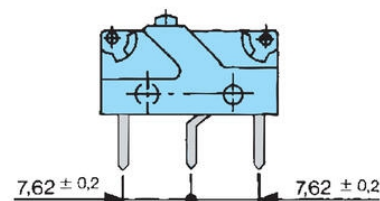



170 E
Arm with roll

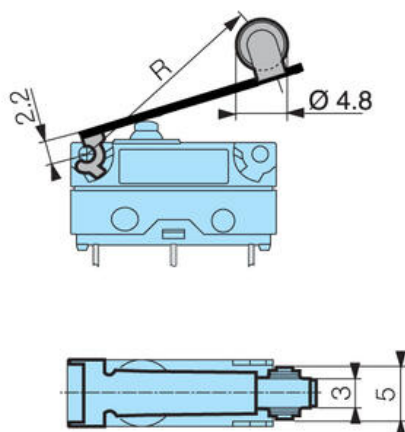


170 A
Straight-arm

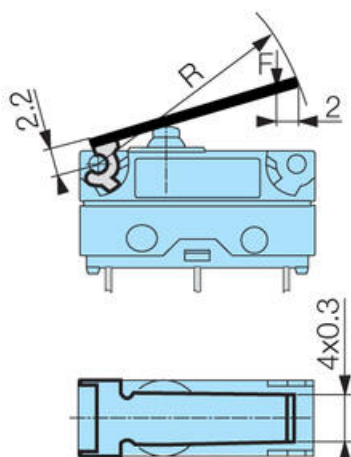


170 F
Arm with simulated scroll

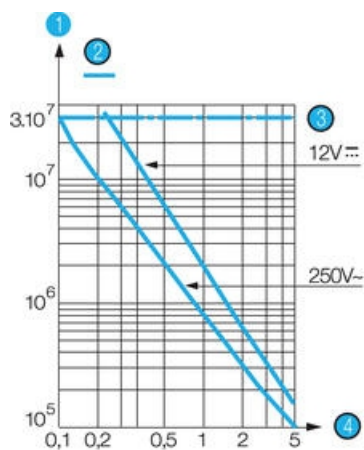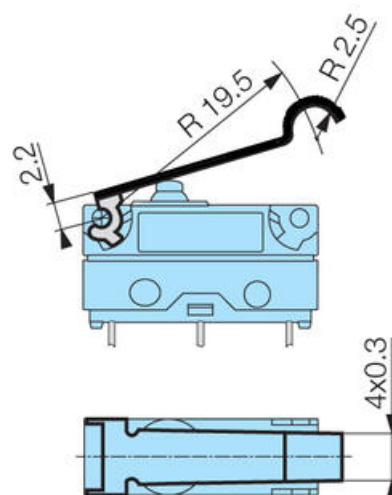

- 1 Number of cycles
- 2 Resistive load
- 3 Mechanical life
- 4 Current (A)

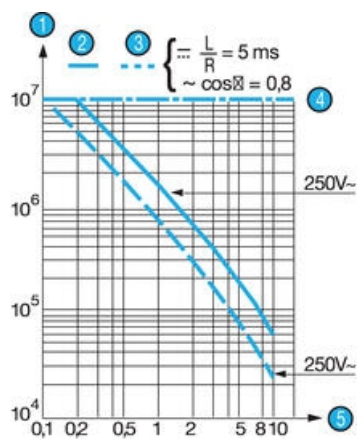

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

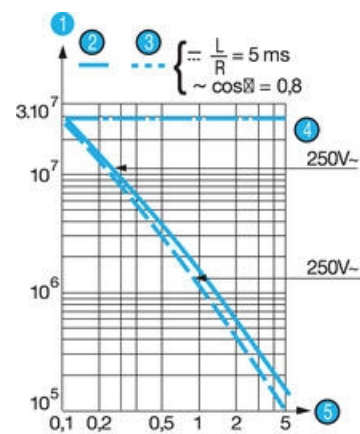

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

Electrical function

Partially




Breaking



Conclusion





83 170 Asymmetric version

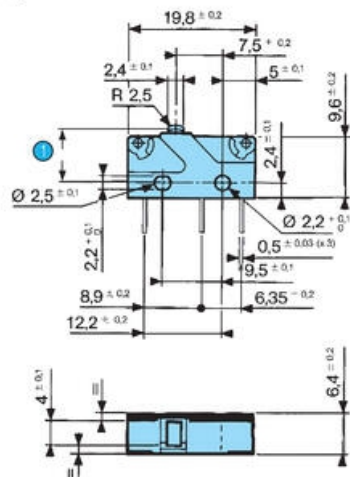


1 OL = 7.6



Mounted with M2 screws
Recommended tightening torque: 2 cm daN

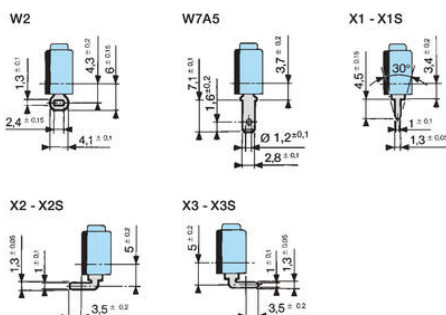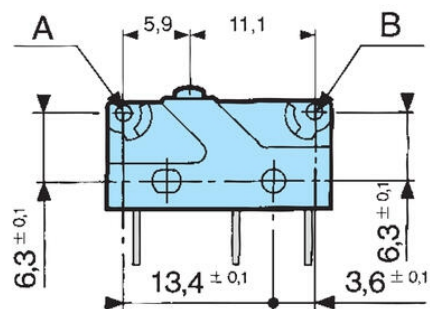


83 170 Symmetrical version

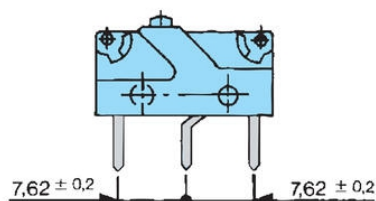

170 E Arm with roll

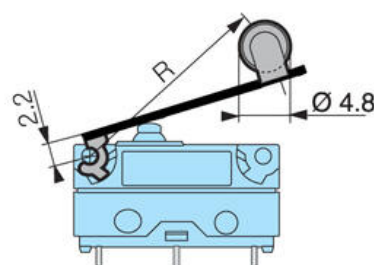

170 A Straight-arm

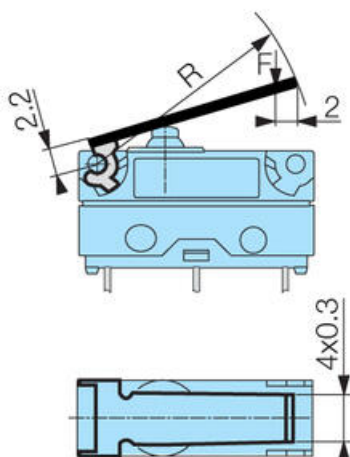

170 F Arm with simulated scroll

