


## END PLATES FOR PRK PUSH IN TERMINALS

End Plates - PAP, PAPD, PTKS-ADH

27114.5

PAP 10/4A Blue, End plate for PRK/PSL 10/4A

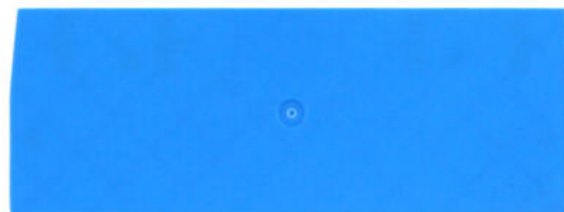

- for PRK, PSL, PRKD, PSLD, PIKD, PVMAK terminlas
- Protective Covers for PTKS
- Multiple Colour options to organise terminals

### PRODUCT DESCRIPTION

The End Plates for PRK Push-In Terminals by CONTA-CLIP are essential accessories designed to cap off terminal assemblies safely and neatly. These end plates are typically mounted at the terminus of a terminal rail or used when a smaller PRK terminal sits adjacent to a larger one, ensuring both contact protection and installation safety. Dimensionally tailored to align with PRK terminal block design, the end plates maintain consistent width and height profiles, facilitating seamless integration into terminal strip configurations. Available in various colours, these end plates also function as visual cues, allowing users to mark different circuits or voltage zones for better system organisation and risk reduction.

These end plates enhance electrical safety by increasing the separation between adjacent conductive elements, thus improving air gaps and insulation distances—which, in turn, can elevate the rated voltage capacity of the terminal assembly. From a practical standpoint, their modular design streamlines both assembly and maintenance: installers can quickly snap on or slide in the appropriate end plate without complex tools, enhancing throughput on wiring tasks. The colour-coding capability also aids troubleshooting and future expansion, because circuits and voltages are immediately identifiable, errors are reduced and system modifications become more intuitive.

## TECHNICAL DATA

### GENERAL DATA

|        |      |
|--------|------|
| Colour | Blue |
|--------|------|

### DIMENSIONS

|        |        |
|--------|--------|
| Length | 110 mm |
| Width  | 15 mm  |
| Height | 415 mm |

### MATERIALS

|                            |               |
|----------------------------|---------------|
| Material                   | Polyamide 6.6 |
| Flammability class         | UL94-V0       |
| Operating temperature from | -40 °C        |
| Operating temperature to   | 120 °C        |

### ADDITIONAL DATA

|                   |          |
|-------------------|----------|
| Tariff code       | 85389099 |
| Country of origin | DE       |

|                  |     |
|------------------|-----|
| <b>Weight</b>    | 1 g |
| <b>Pack size</b> | 20  |