


## PICK-OFF TERMINALS AND TEST ADAPTERS

MAG, SMAG, STA, TA, ZTA, EP

17260.2

STA 5/1, Test adaptor 5mm wide for SRK/SSL series, use with STA ZP for wider terminals

- STA, SMAG compatible with SRK series
- SMAG extends standard feed-through terminal up to 4 connections
- STA test adapters for SRK series
- TA test adapters for RK series
- ZTA Test adaptors for ZIZA/ZRK series

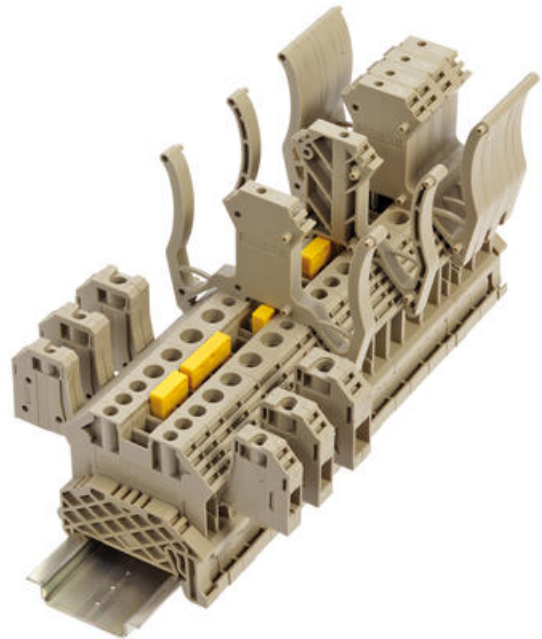

### PRODUCT DESCRIPTION

CONTA-CLIP offers specific and innovative accessories for the SRK | SSL screw connection system.

#### Pick-off terminals SMAG

- The SMAG pick-off terminals make possible one or two additional extra wire connectors onto the SRK terminal blocks and therefore extend the standard feed-through terminal by up to four connectors.
- The SMAGs are mechanically snapped into the SRK terminal blocks.
- The SMAG busbar is connected via the corresponding base connection of the terminal block, the rated cross section is thereby reduced to the next lower size.

#### Test adapter STA

- The ST test adapter can be used to quickly and safely test pre-wired terminal blocks.
- A test plug block can be mounted with any number of poles using the locking pegs and the STA ZP intermediate plate with widths from 1 to 3 mm. The STA ZP intermediate plate allows the assembly of a test plug block, which can also be mounted on different block widths (SRK/SSL 2.5 | 4 | 6 | 10).
- Thanks to its innovative design the STA test adapter can be rotated through 180°. It can therefore also be mounted onto the SRK terminal block, whereby one of the cross-connection channels is already occupied by a cross-connector.

## TECHNICAL DATA

### GENERAL DATA

|                        |                       |
|------------------------|-----------------------|
| Colour                 | Beige                 |
| Additional information | for SRK 2,5 on busbar |

### DIMENSIONS

|        |       |
|--------|-------|
| Length | 70 mm |
| Pitch  | 5 mm  |

### CONNECTION DATA

|                                  |                     |
|----------------------------------|---------------------|
| Cross section stranded wire from | 0.5 mm <sup>2</sup> |
| Cross section stranded wire to   | 1 mm <sup>2</sup>   |

### MATERIALS

|                            |               |
|----------------------------|---------------|
| Insulation material        | Polyamide 6.6 |
| Flammability class         | UL94-V2       |
| Operating temperature from | -40 °C        |
| Operating temperature to   | 120 °C        |

### ADDITIONAL DATA

|                   |                                     |
|-------------------|-------------------------------------|
| Tariff code       | 85369010                            |
| Country of origin | DE                                  |
| Weight            | 7.3 g                               |
| Pack size         | 10                                  |
| Type of terminal  | Screw Terminals, DIN Rail terminals |