


## CROSS CONNECTORS FOR RK, IK, DLI & SK RANGE

Q, QI

2567.0

Q 2 - 2 pole cross connector for RK/RKD 2.5

- Screw in
- Insulated versions
- Can be cut down

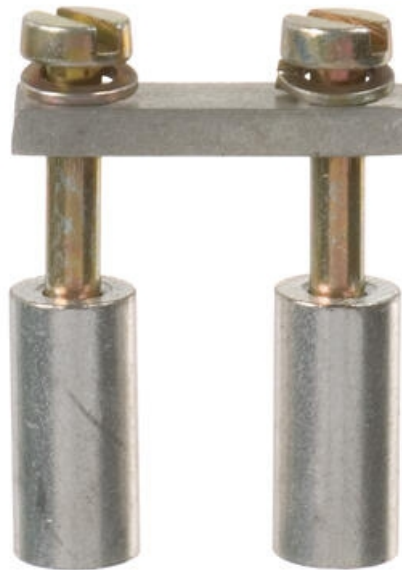

### PRODUCT DESCRIPTION

The Q/QI screwable cross-connector system allows you to quickly link terminal blocks of the same size.

The QI range is touch-safe and are generally available in 2, 3, 4 or 10 poles, some variants have up to 98 poles, which can be cut down as required.

With both ranges it is possible to 'skip' over terminals by breaking out the conductor (QI) or removing the screw and sleeve (Q).

## TECHNICAL DATA

### GENERAL DATA

Rated wire cross section	2.5 mm <sup>2</sup>
Max voltage with partition	800 V
Max voltage without partition	400 V
Rated current IEC	20 A
Mounting	Screw in
Contamination degree	3
Additional information	for RK 2,5   KBL 2,5   RKD 2,5   KBLD 2,5

### DIMENSIONS

Length	4 mm
Width	9.1 mm
Distance to hole centres	5.1 mm

<b>Pitch</b>	5 mm
<b>Hole diameter</b>	2.8 mm

## CONNECTION DATA

<b>Number of poles</b>	2
<b>Screw size</b>	M 2,5
<b>Screw type</b>	Slotted
<b>Torque min</b>	0.4
<b>Torque max</b>	0.8

## MATERIALS

<b>Material</b>	Copper
-----------------	--------

## ADDITIONAL DATA

<b>Tariff code</b>	85369010
<b>Country of origin</b>	DE
<b>Weight</b>	2.2 g
<b>Pack size</b>	50