
OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

CROSS CONNECTORS FOR RK, IK, DLI & SK RANGE

Q, QI

2742.2
QI 4 - 4 pole insulated cross connector for RK 2.5 - 4

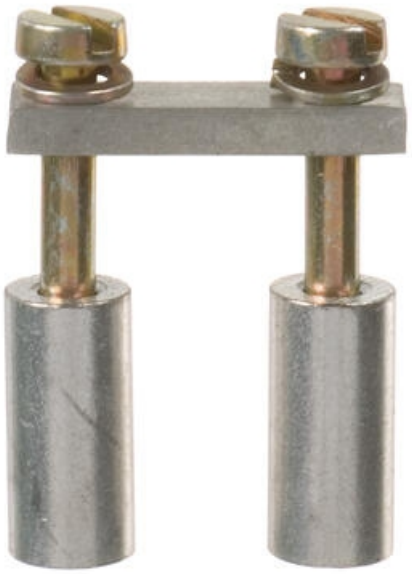

- Screw in
- Insulated versions
- Can be cut down

PRODUCT DESCRIPTION

The Q/QI screwable cross-connector system allows you to quickly link terminal blocls of the same size.

The QI range is touch-safe and are generally available in 2, 3, 4 or 10 poles, some variants have up to 98 poles, which can be cut down as required.

With both ranges it is possible to 'skip' over terminals by breaking out the conductor (QI) or removing the screw and sleeve (Q).

TECHNICAL DATA

GENERAL DATA

Colour	Yellow
Max voltage with partition	800 V
Max voltage without partition	400 V
Rated current IEC	32 A
Mounting	Screw in
Contamination degree	3
Additional information	for RK 2,5-4 | KBL 2,5-4 | FF 2,5 | SF 2,5

DIMENSIONS

Length	2.3 mm
Width	21.9 mm
Pitch	6 mm

CONNECTION DATA

Number of poles	4
Screw size	M 3
Screw type	Slotted
Torque min	0.5
Torque max	1

MATERIALS

Material	Copper
Insulation material	Polyamide 6.6
Flammability class	UL94-V2
Operating temperature from	-40 °C
Operating temperature to	105 °C

ADDITIONAL DATA

Tariff code	85369010
Country of origin	DE
Weight	7.05 g
Pack size	20