
**OEM Automatic Ltd**
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

# EXTERNAL LINK CROSS CONNECTORS

AQI External Terminal Link Bars

2126.0
AQI 3/6/11 - 3 pole External Cross connector for RK1.5-4/RKD4/BKA4/VMAK2.5

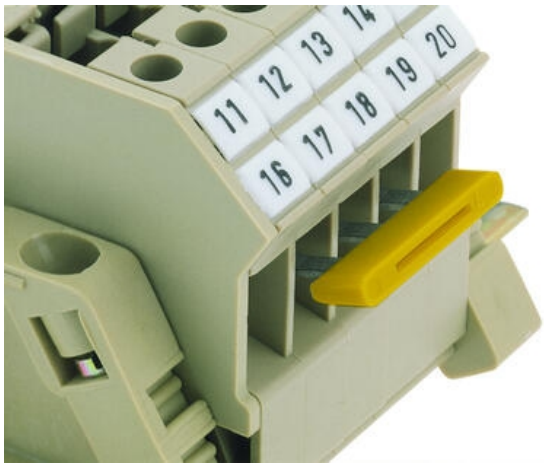


- Insulated for protection
- Reliable & secure fixing
- Easy Installation

### PRODUCT DESCRIPTION

External cross connection links makes it possible to connect potentials of terminals where there is no option of a central cross connection channel.

These links are quicker, easier and a more reliable way of linking than using wire links with ferrules.

When using the external, the rated cross section of wire is reduced to the next smallest size.

# TECHNICAL DATA

## GENERAL DATA

| | |
|---|---|
| **Colour** | Yellow |
| **Rated current IEC** | 27 A |
| **Mounting** | Push in |
| **Contamination degree** | 3 |
| **Additional information** | for RK 1,5-4… \| RKB 4 \| RKD 4 \| BKA 4 \| VMAK 2,5 |

## DIMENSIONS

| | |
|---|---|
| **Width** | 16.9 mm |
| **Pitch** | 6 mm |

## CONNECTION DATA

| | |
|---|---|
| **Number of poles** | 3 |

## MATERIALS

| | |
|---|---|
| **Material** | Copper |
| **Insulation material** | Polyamide 6.6 |
| **Flammability class** | UL94-V2 |

| | |
|---|---|
| **Operating temperature from** | -40 °C |
| **Operating temperature to** | 105 °C |

## ADDITIONAL DATA

| | |
|---|---|
| **Tariff code** | 85369010 |
| **Country of origin** | DE |
| **Weight** | 0.5 g |
| **Pack size** | 50 |