
**OEM Automatic Ltd**
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

# CROSS CONNECTORS FOR RK, IK, DLI & SK RANGE

Q, QI

2424.0
Q 4 - 4 pole cross connector for SRK/IK/IKD 2.5

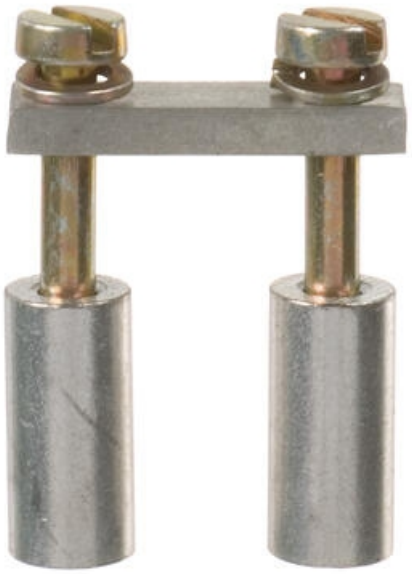

- Screw in
- Insulated versions
- Can be cut down

### PRODUCT DESCRIPTION

The Q/QI screwable cross-connector system allows you to quickly link terminal blocls of the same size.

The QI range is touch-safe and are generally available in 2, 3, 4 or 10 poles, some variants have up to 98 poles, which can be cut down as required.

With both ranges it is possible to 'skip' over terminals by breaking out the conductor (QI) or removing the screw and sleeve (Q).

# TECHNICAL DATA

## GENERAL DATA

| | |
|---|---|
| **Rated wire cross section** | 2.5 mm² |
| **Max voltage with partition** | 400 V |
| **Max voltage without partition** | 400 V |
| **Rated current IEC** | 20 A |
| **Mounting** | Screw in |
| **Contamination degree** | 3 |
| **Additional information** | for SRK 2,5 (1.gen.) \| IK 2,5 \| IKD 2,5 |

## DIMENSIONS

| | |
|---|---|
| **Length** | 4 mm |
| **Width** | 19.3 mm |
| **Distance to hole centres** | 5.1 mm |

| | |
|---|---|
| **Pitch** | 5 mm |
| **Hole diameter** | 2.8 mm |

## CONNECTION DATA

| | |
|---|---|
| **Number of poles** | 4 |
| **Screw size** | M 2,5 |
| **Screw type** | Slotted |
| **Torque min** | 0.4 |
| **Torque max** | 0.8 |

## MATERIALS

| | |
|---|---|
| **Material** | Copper |

## ADDITIONAL DATA

| | |
|---|---|
| **Tariff code** | 85369010 |
| **Country of origin** | DE |
| **Weight** | 3.3 g |
| **Pack size** | 20 |