
OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

CROSS CONNECTORS FOR RK, IK, DLI & SK RANGE

Q, QI

2700.0
Q 20 - 20 pole cross connector for SRK/IK/IKD 2.5

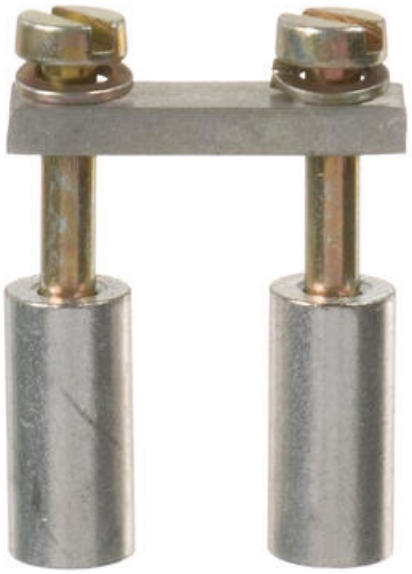

- Screw in
- Insulated versions
- Can be cut down

PRODUCT DESCRIPTION

The Q/QI screwable cross-connector system allows you to quickly link terminal blocls of the same size.

The QI range is touch-safe and are generally available in 2, 3, 4 or 10 poles, some variants have up to 98 poles, which can be cut down as required.

With both ranges it is possible to 'skip' over terminals by breaking out the conductor (QI) or removing the screw and sleeve (Q).

TECHNICAL DATA

GENERAL DATA

Rated wire cross section	2.5 mm²
Max voltage with partition	400 V
Max voltage without partition	400 V
Rated current IEC	20 A
Mounting	Screw in
Contamination degree	3
Additional information	for SRK 2,5 (1.Gen.) | IK 2,5 | IKD 2,5

DIMENSIONS

Length	4 mm
Width	100.9 mm
Distance to hole centres	5.1 mm

Pitch	5 mm
Hole diameter	2.8 mm

CONNECTION DATA

Number of poles	20
Screw size	M 2,5
Screw type	Slotted
Torque min	0.4
Torque max	0.8

MATERIALS

Material	Copper

ADDITIONAL DATA

Tariff code	85369010
Country of origin	DE
Weight	16.35 g
Pack size	10