0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk




## **PICK-OFF TERMINALS AND TEST ADAPTERS**

MAG, SMAG, STA, TA, ZTA, EP

3810.2 ZTA 16, Test adaptor for ZRK/ZSL 16

- STA, SMAG compatible with SRK series
- · SMAG extends standard feed-through terminal up to 4 connections
- STA test adapters for SRK series
- TA test adapters dfor RK series
- ZTA Test adaptors for ZIZA/ZRK series

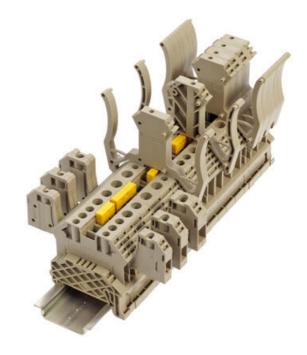

### PRODUCT DESCRIPTION

CONTA-CLIP offers specific and innovative accessories for the SRK I SSL screw connection system.

#### Pick-off terminals SMAG

- The SMAG pick-off terminals make possible one or two additional extra wire connectors onto the SRK terminal blocks and therefore extend the standard feed-through terminal by up to four connectors.
- The SMAGs are mechanically snapped into the SRK terminal blocks.
- The SMAG busbar is connected via the corresponding base connection of the terminal block, the rated cross section is thereby reduced to the next lower size.

#### **Test adapter STA**

- The ST test adapter can be used to quickly and safely test pre-wired terminal blocks.
- A test plug block can be mounted with any number of poles using the locking pegs and the STA ZP intermediate plate with widths from 1 to 3 mm. The STA ZP intermediate plate allows the assembly of a test plug block, which can also be mounted on different block widths (SRK/SSL 2.5 | 4 | 6 |
- Thanks to its innovative design the STA test adapter can be rotated through 180°. It can therefore also be mounted onto the SRK terminal block, whereby one of the cross-connection channels is already occupied by a cross-connector.

## **TECHNICAL DATA**

### **GENERAL DATA**

Colour	Beige
Additional information	for tension-spring terminals 16 mm <sup>2</sup>

### **DIMENSIONS**

Length	32.3 mm
Pitch	12 mm

#### **CONNECTION DATA**

Cross section stranded wire from	0.5 mm²
Cross section stranded wire to	1 mm²
Stripping length	5 mm

# **MATERIALS**

Insulation material	Polyamide 6.6
Flammability class	UL94-V2
Operating temperature from	-40 °C
Operating temperature to	105 °C

# **ADDITIONAL DATA**

Tariff code	85369010
Country of origin	DE
Weight	4.14 g
Pack size	10