
OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

CROSS CONNECTORS FOR RK, IK, DLI & SK RANGE

Q, QI

2366.0
QS 2, 2 way cross connect bar for SK 1 Fuse terminals, use with 2365.0 BS Screws

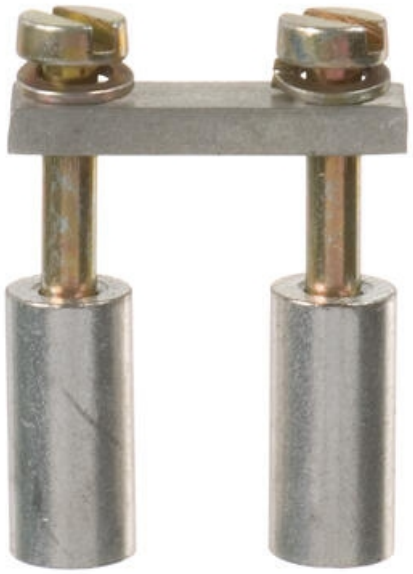

- Screw in
- Insulated versions
- Can be cut down

PRODUCT DESCRIPTION

The Q/QI screwable cross-connector system allows you to quickly link terminal blocls of the same size.

The QI range is touch-safe and are generally available in 2, 3, 4 or 10 poles, some variants have up to 98 poles, which can be cut down as required.

With both ranges it is possible to 'skip' over terminals by breaking out the conductor (QI) or removing the screw and sleeve (Q).

TECHNICAL DATA

GENERAL DATA

Mounting	Screw in
Additional information	for SK 1/32 KRG | SK 1/35 KRG

DIMENSIONS

Length	6 mm
Width	20.1 mm
Height	2 mm
Distance to hole centres	11.9 mm
Pitch	12 mm
Hole diameter	3.4 mm

CONNECTION DATA

Number of poles	2

MATERIALS

Material	Brass

ADDITIONAL DATA

Tariff code	85369010
Country of origin	DE
Weight	1.8 g
Pack size	50