OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

I SERIES, MULTICOLOUR PANEL MOUNT BEACON, Ø65, Ø45 AND Ø30MM,

800626405
Panel mount LED Beacon, Ø30mm, Red/Green, 24 V ac/dc, IDS



- Ø65, Ø45 and Ø30mm Panel mount beacons
- Strobe, Flashing and Steady LED options
- Wide control voltage range

PRODUCT DESCRIPTION

The I series offers a high quality, bright, panel mounted beacon. The units can be single or dual colour, have multiple colour and voltage options and in the case of IMM/IMM can be pre-cable with IP67 Protection.

- Versatile usable panel mount beacon range for mounting in Ø 22,5 mm bore holes (adapter for 30,5 mm bore holes available)
- 3 dimensions (Ø 65, 45, 30 mm)
- Comprehensive product range M22 panel mount beacon with demountable plug in terminal or (individually) prewired
- Complete range of LED steady/flashing/strobe and multi colour models for versatile applications in the industry, enclosures, etc.
- Maintenance free, low current consumption, long life time, shock and vibration-proof
- Multi colour models in 6 LED colours individually selectable
- Housing and lenses made of impact resistant polycarbonate, housing colour black or grey
- PLC fit (leakage/inrush current)
- Particular lens pattern for optimum light dispersion
- Fastening tool for 30 mm models for difficult reachable positions available

TECHNICAL DATA

GENERAL DATA

Light type	Multi Colour

ADDITIONAL DATA


IP class	IP65

Temperature operational min	-25 °C
Temperature operational max	50 °C
Nominal voltage	24 V AC/DC

Val av sken

La≃	N	Lb≃	
x	x		Fast sken, färg 1
	x	x	Fast sken, färg 2



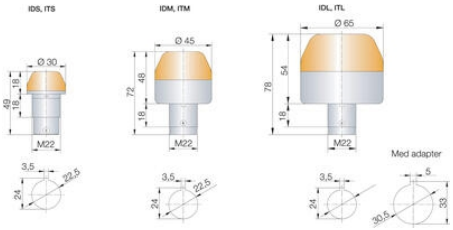

Val av sken

La≃	N	Lb≃	
x	x		Fast sken, färg 1
	x	x	Fast sken, färg 2

