OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

I SERIES, MULTICOLOUR PANEL MOUNT BEACON, Ø65, Ø45 AND Ø30MM,

801550405
Panel mount multi-colour beacon, Ø45mm, 24 V ac/dc, IMM



- Ø65, Ø45 and Ø30mm Panel mount beacons
- Strobe, Flashing and Steady LED options
- Wide control voltage range

PRODUCT DESCRIPTION

The I series offers a high quality, bright, panel mounted beacon. The units can be single or dual colour, have multiple colour and voltage options and in the case of IMM/IMM can be pre-cable with IP67 Protection.

- Versatile usable panel mount beacon range for mounting in Ø 22,5 mm bore holes (adapter for 30,5 mm bore holes available)
- 3 dimensions (Ø 65, 45, 30 mm)
- Comprehensive product range M22 panel mount beacon with demountable plug in terminal or (individually) prewired
- Complete range of LED steady/flashing/strobe and multi colour models for versatile applications in the industry, enclosures, etc.
- Maintenance free, low current consumption, long life time, shock and vibration-proof
- Multi colour models in 6 LED colours individually selectable
- Housing and lenses made of impact resistant polycarbonate, housing colour black or grey
- PLC fit (leakage/inrush current)
- Particular lens pattern for optimum light dispersion
- Fastening tool for 30 mm models for difficult reachable positions available

TECHNICAL DATA

GENERAL DATA

Lens colour	Clear
Light type	Multi
Light source	LED
Housing Colour	Black
Mounting	Panel mount

RATED OPERATING CONDITIONS

Terminal connection	2.5 mm²

DIMENSIONS

Diameter	45 mm


ADDITIONAL DATA


IP class	IP65

Supply voltage	24 V
Supply voltage ac/dc max	26.4 V
Supply voltage ac/dc min	21.6 V
Temperature operational min	-25 °C
Temperature operational max	50 °C
Nominal current max	0.027 A
Nominal current min	0.027 A

Val av sken

La≃	N	Lb≃	
x	x		Fast sken, färg 1
	x	x	Fast sken, färg 2

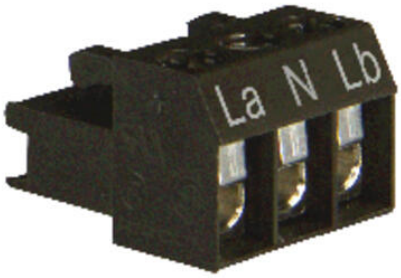

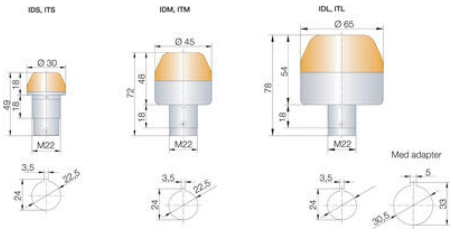

Val av sken

La≃	N	Lb≃	
x	x		Fast sken, färg 1
	x	x	Fast sken, färg 2



