



## I SERIES, MULTICOLOUR PANEL MOUNT BEACON, Ø65, Ø45 AND Ø30MM,

802550405

Panel mount multi-colour beacon, Ø65mm, 24 V ac/dc, IML



- Ø65, Ø45 and Ø30mm Panel mount beacons
- Strobe, Flashing and Steady LED options
- Wide control voltage range

### PRODUCT DESCRIPTION

The I series offers a high quality, bright, panel mounted beacon. The units can be single or dual colour, have multiple colour and voltage options and in the case of IMM/IMM can be pre-cable with IP67 Protection.

- Versatile usable panel mount beacon range for mounting in Ø 22,5 mm bore holes (adapter for 30,5 mm bore holes available)
- 3 dimensions (Ø 65, 45, 30 mm)
- Comprehensive product range M22 panel mount beacon with demountable plug in terminal or (individually) prewired
- Complete range of LED steady/flashing/strobe and multi colour models for versatile applications in the industry, enclosures, etc.
- Maintenance free, low current consumption, long life time, shock and vibration-proof
- Multi colour models in 6 LED colours individually selectable
- Housing and lenses made of impact resistant polycarbonate, housing colour black or grey
- PLC fit (leakage/inrush current)
- Particular lens pattern for optimum light dispersion
- Fastening tool for 30 mm models for difficult reachable positions available

## TECHNICAL DATA

### GENERAL DATA

Lens colour	Clear
Light type	Multi
Light source	LED
Housing Colour	Black
Mounting	Panel mount

### RATED OPERATING CONDITIONS

Terminal connection	2.5 mm <sup>2</sup>
---------------------	---------------------

### DIMENSIONS



Diameter	60 mm
----------	-------

ADDITIONAL DATA

IP class	IP65
Supply voltage	24 V
Supply voltage ac/dc max	26.4 V
Supply voltage ac/dc min	21.6 V
Temperature operational min	-25 °C
Temperature operational max	50 °C
Nominal current max	0.043 A
Nominal current min	0.043 A

Val av sken

La≈	N	Lb≈
x	x	Fast sken, färg 1
x	x	Fast sken, färg 2

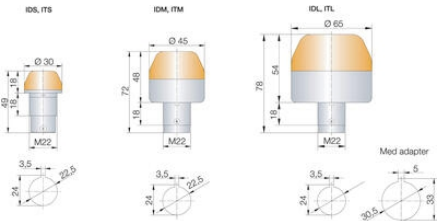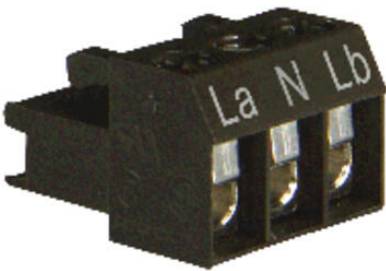

Val av sken

La≈	N	Lb≈
x	x	Fast sken, färg 1
x	x	Fast sken, färg 2

