
OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

GSM-TMM SIMPLE SMS MODULE

GSM-TMM

16511.2
GSM-TMM, Auto Send SMS Module, 230VAC

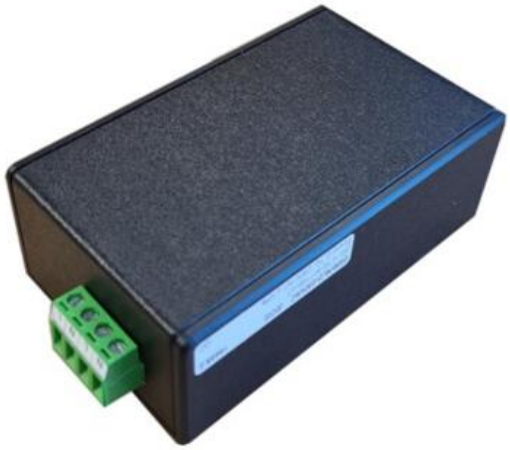

- SMS Send on Power Up
- 230V AC and 12VDC/24VADC versions available
- Simple programming
- Supporting LTE-M, NB-IOT, 2G
- LED status indication

PRODUCT DESCRIPTION

Simple compact SMS device that sends a single SMS to 1-5 recipients on power up, with or without confirmation.

The GSM-TMM (Trigger Message Module) can be wired in series or parallel with any powered device, such as beacon, sounders or switched output.
The unit can be programmed via USB (no external power required for programming)

Standard micro SIM, SMA antenna connection.

TECHNICAL DATA

OTHER TECHNICAL DATA


Length	106 mm
Width	54 mm
Height	39 mm

SIM card	Nano-SIM
Tariff code	85176990
Number of inputs	1
Stripping length	6 mm
2G	Quad-band GSM bands: 850, 900, 1800 and 1900 MHz
3G	LTE CAT-M: B1/B2/B3/B4/B5/B8/B12/B13/B14/B18/B19/B20/B25/B26/B27/B28/B66/B85
Pack size	1
Supply voltage	85 -264V AC

Operating temperature from	-30 °C
Operating temperature to	70 °C
Weight	147 g
Antenna GSM	50 Ohm, SMA-plug
Connection type	Pluggable
Country of origin	NL
Cross section single wire from	0.2 mm²
Cross section single wire to	2.5 mm²
Current consumption	10 mA @ 230V ac
DIN-VDE Spec	Low Voltage Directive (LVD) 2014/35/EU, according requirements of EN 62477-1 Directive 2014/30/EU, in compliance with EN 55011 and EN 61326-1, RED 2014/53/EU
Electromagnetic compatibility	EN55011, EN61326-1
GPS	No
IP class	IP20
Mounting	Direct mount






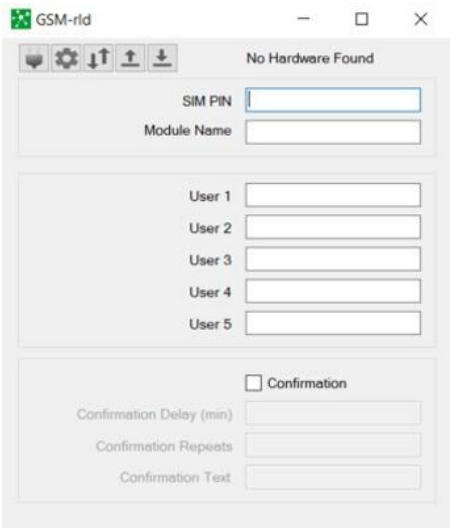



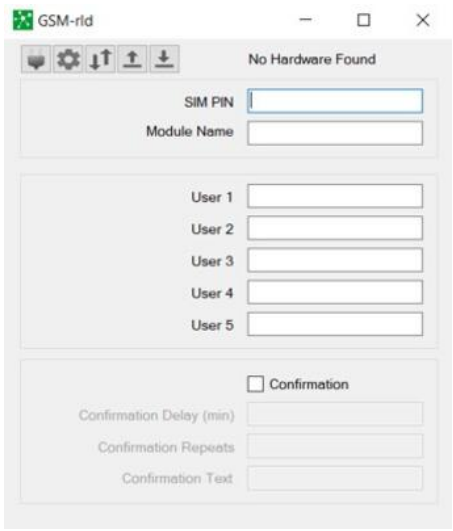


GSM-rld
No Hardware Found
SIM PIN
Module Name
User 1
User 2
User 3
User 4
User 5
Confirmation
Confirmation Delay (min)
Confirmation Repeats
Confirmation Text