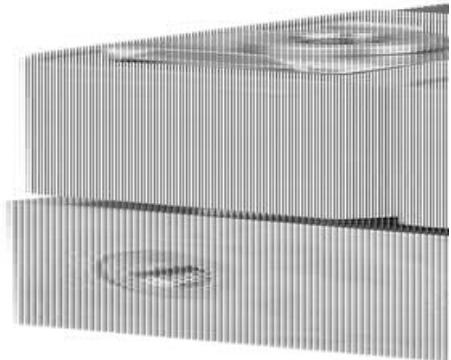


**ASCO - 356 SERIES DIRECT OPERATED**

## 3/2 Valve Block

SCG356A819V  
2 valve manifold, N/C, 3/2, 1/8", 230VAC

- Normally closed/open or universal
- Save space and installation time
- Working pressure 0 bar to 10 bar
- Block in brass or stainless

**PRODUCT DESCRIPTION****TECHNICAL DATA****GENERAL DATA**

<b>Function</b>	3/2, Normally Closed
<b>Flow factor / flow coefficient</b>	0,08
<b>IP class</b>	IP65

**MATERIAL DATA**

<b>Material body</b>	Brass
<b>Material of seals</b>	FPM
<b>Material seat</b>	Brass

**TEMPERATURE DATA**

<b>Temperature of media from</b>	-10 °C
<b>Temperature of media to</b>	100 °C

**ADDITIONAL DATA**

<b>Close delay</b>	5 ms
<b>Viscosity max</b>	40 cSt
<b>Approvals</b>	CSA, UL

<b>Weight</b>	0.321 kg
<b>Power consumption</b>	4 W
<b>Throughput</b>	1.6 mm
<b>Response time off</b>	10 ms
<b>Voltage ac max</b>	230 V
<b>Temperature operational min</b>	-10 °C
<b>Temperature operational max</b>	60 °C
<b>Connection port 1-2</b>	G1/8
<b>Connection port 3</b>	M5
<b>Differential air pressure max</b>	10 bar
<b>Differential pressure min</b>	0 bar
<b>Differential oil pressure max</b>	10 bar
<b>Differential water pressure max</b>	10 bar
<b>Flow max</b>	1.33 l/min
<b>Material plunger</b>	Stainless steel
<b>Material short-circuit ring</b>	Copper
<b>Material seat seal</b>	FPM
<b>Material spring</b>	Stainless steel
<b>Number of valves</b>	2

