




## ASCO - 356 SERIES DIRECT OPERATED

### 3/2 Valve Block

SCG356A819V

2 valve manifold, N/C, 3/2, 1/8", 230VAC

- Normally closed/open or universal
- Save space and installation time
- Working pressure 0 bar to 10 bar
- Block in brass or stainless

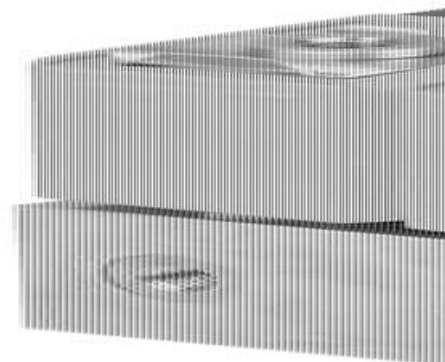

#### PRODUCT DESCRIPTION

#### TECHNICAL DATA

##### GENERAL DATA

Function	3/2, Normally Closed
Flow factor / flow coefficient	0,08
IP class	IP65

##### MATERIAL DATA

Material body	Brass
Material of seals	FPM
Material seat	Brass

##### TEMPERATURE DATA

Temperature of media from	-10 °C
Temperature of media to	100 °C

##### ADDITIONAL DATA

Close delay	5 ms
Viscosity max	40 cSt
Approvals	CSA, UL

<b>Weight</b>	0.321 kg
<b>Power consumption</b>	4 W
<b>Throughput</b>	1.6 mm
<b>Response time off</b>	10 ms
<b>Voltage ac max</b>	230 V
<b>Temperature operational min</b>	-10 °C
<b>Temperature operational max</b>	60 °C
<b>Connection port 1-2</b>	G1/8
<b>Connection port 3</b>	M5
<b>Differential air pressure max</b>	10 bar
<b>Differential pressure min</b>	0 bar
<b>Differential oil pressure max</b>	10 bar
<b>Differential water pressure max</b>	10 bar
<b>Flow max</b>	1.33 l/min
<b>Material plunger</b>	Stainless steel
<b>Material short-circuit ring</b>	Copper
<b>Material seat seal</b>	FPM
<b>Material spring</b>	Stainless steel
<b>Number of valves</b>	2

