




ASCO - 356 SERIES DIRECT OPERATED

3/2 Valve Block

SCG356A822V

5 valve manifold, N/C, 3/2, 1/8", 230VAC

- Normally closed/open or universal
- Save space and installation time
- Working pressure 0 bar to 10 bar
- Block in brass or stainless

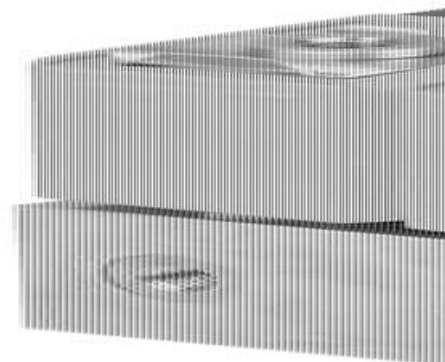

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

| | |
|--------------------------------|-----------------------------|
| Function | 3/2, Normally Closed (SPST) |
| Flow factor / flow coefficient | 0,08 |
| IP class | IP65 |

MATERIAL DATA

| | |
|-------------------|-------|
| Material body | Brass |
| Material of seals | FPM |
| Material seat | Brass |

TEMPERATURE DATA

| | |
|---------------------------|--------|
| Temperature of media from | -10 °C |
| Temperature of media to | 100 °C |

ADDITIONAL DATA

| | |
|---------------|---------|
| Close delay | 5 ms |
| Viscosity max | 40 cSt |
| Approvals | CSA, UL |

| | |
|--|-----------------|
| Weight | 0.636 kg |
| Power consumption | 4 W |
| Throughput | 1.6 mm |
| Response time off | 10 ms |
| Voltage ac max | 230 V |
| Temperature operational min | -10 °C |
| Temperature operational max | 60 °C |
| Connection port 1-2 | G1/8 |
| Connection port 3 | M5 |
| Differential air pressure max | 10 bar |
| Differential pressure min | 0 bar |
| Differential oil pressure max | 10 bar |
| Differential water pressure max | 10 bar |
| Flow max | 1.33 l/min |
| Material plunger | Stainless steel |
| Material short-circuit ring | Copper |
| Material seat seal | FPM |
| Material spring | Stainless steel |
| Number of valves | 5 |

