




## ASCO - 356 SERIES DIRECT OPERATED

### 3/2 Valve Block

SCG356A857V

4 valve manifold, N/C, 3/2, 1/8", 230VAC

- Normally closed/open or universal
- Save space and installation time
- Working pressure 0 bar to 10 bar
- Block in brass or stainless

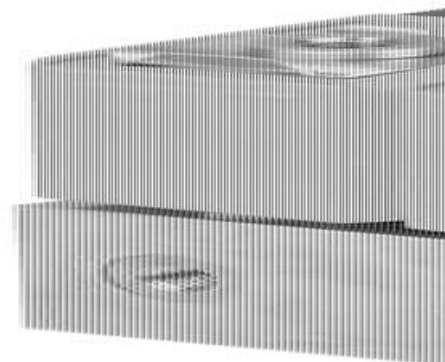

#### PRODUCT DESCRIPTION

#### TECHNICAL DATA

##### GENERAL DATA

Function	3/2, Normally Closed (SPST)
Flow factor / flow coefficient	0,13
IP class	IP65

##### MATERIAL DATA

Material body	Brass
Material of seals	FPM
Material seat	Brass

##### TEMPERATURE DATA

Temperature of media from	-10 °C
Temperature of media to	100 °C

##### ADDITIONAL DATA

Close delay	5 ms
Viscosity max	40 cSt
Approvals	CSA, UL

