OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

ASCO - 2/2 PULSE VALVE 3/4"-1 1/2"

SCE353A811
Solenoid pulse valve 2/2 NC 3/4" 230/50

- Currentless closed
- Thread or quick coupling
- Electric/Air controlled
- Housing in aluminium




PRODUCT DESCRIPTION

TECHNICAL DATA

Voltage AC	230 V
Differential pressure min	0.3 bar
Differential pressure max	8.5 bar
Differential air pressure max	8.5 bar
Function 1	2/2
Function 2	Normally Closed
Connection	3/4 BSP
Flow max	233 l/min
Material body	Aluminium
Temperature of media from	-20 °C
Temperature of media to	85 °C
Throughput	20 mm

Power consumption	6.3 W
Material coil	Epoxy
Weight	0.52 kg

Material plunger	Stainless steel
Flow factor / flow coefficient	14
Material spring	Stainless steel
Material of seals	NBR
Pressure max	10 bar
Temperature operational max	85 °C
Temperature operational min	-20 °C
IP class	IP65
Material short-circuit ring	Copper
Material flask	POM

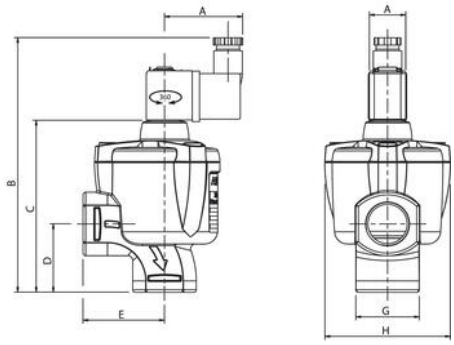

Ventil	A	B	C	D	E	F	G	H
SCE353A811	48	156	106	42	50	22	39	77
SCE353A821	48	162	112	51	62	22	46	77
SCE353A831	48	191	141	60	71	22	62	112