

## ASCO - 2/2 PULSE VALVE 3/4"-1 1/2"

SCS353A821

Solenoid valve 2/2 NC 1 230/50

- Currentless closed
- Thread or quick coupling
- Electric/Air controlled
- Housing in aluminium



### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### GENERAL DATA

Connection	G1
Flow factor / flow coefficient	23
IP class	IP65

#### MATERIAL DATA

Material body	Aluminium
Material of seals	NBR


#### TEMPERATURE DATA

Temperature of media from	-20 °C
Temperature of media to	85 °C

#### ADDITIONAL DATA

Pressure max	10 bar
Weight	0.63 kg
Power consumption	6.3 W

Throughput	25 mm
Voltage AC	230 V
Temperature operational min	-20 °C
Temperature operational max	85 °C
Material coil	Epoxy
Differential air pressure max	8.5 bar
Differential pressure max	8.5 bar
Differential pressure min	0.3 bar
Flow max	383 l/min
Function 1	2/2
Function 2	Normally Closed (SPST)
Material flask	POM
Material plunger	Stainless steel
Material short-circuit ring	Copper
Material spring	Stainless steel

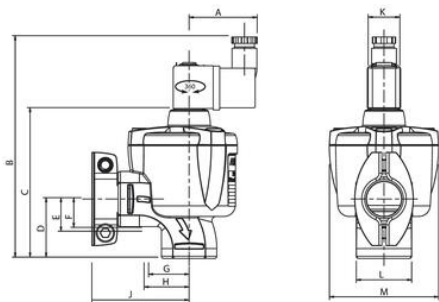

Ventil	A	B	C	D	E	F	G	H
SCS353A811	48	156	106	42	24	21	29	32
SCS353A821	48	162	112	51	32	26	37	43
SCS353A831	48	191	141	60	97	22	62	112