



ASCO - 2/2 PULSE VALVE 3/4"-3"

SCG353052

Solenoid pulse valve 2/2 NC 3/4" 230/50 quick con

- Currentless closed
- Thread or quick coupling
- Electric/air controlled
- Housing in aluminium



PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Connection	3/4 BSP, Compression fittings
Flow factor / flow coefficient	14
IP class	IP65

MATERIAL DATA

Material body	Aluminium
Material of seals	NBR


TEMPERATURE DATA

Temperature of media from	-20 °C
Temperature of media to	85 °C

ADDITIONAL DATA

Pressure max	10 bar
Weight	0.85 kg
Power consumption	6 W

Throughput	25 mm
Voltage AC	230 V
Temperature operational min	-20 °C
Temperature operational max	85 °C
Material coil	Epoxy
Differential air pressure max	8.5 bar
Differential pressure min	0.35 bar
Flow max	233 l/min
Function 1	2/2
Function 2	Normally Closed (SPST)
Material plunger	Stainless steel
Material short-circuit ring	Copper
Material spring	Stainless steel
Material membrane	TPE

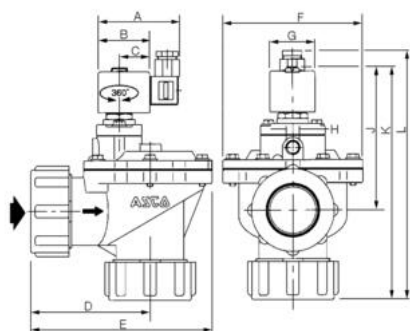

Ventil	A	B	C	D	E	F	G	H	J	K	L
SCG353052	75	45	27	88	125	75	39	-	92	175	195
SCG353053	75	45	27	88	125	75	39	-	92	175	195
SCG353065	80	50	30	117	177	136	45	3/8	131	225	242