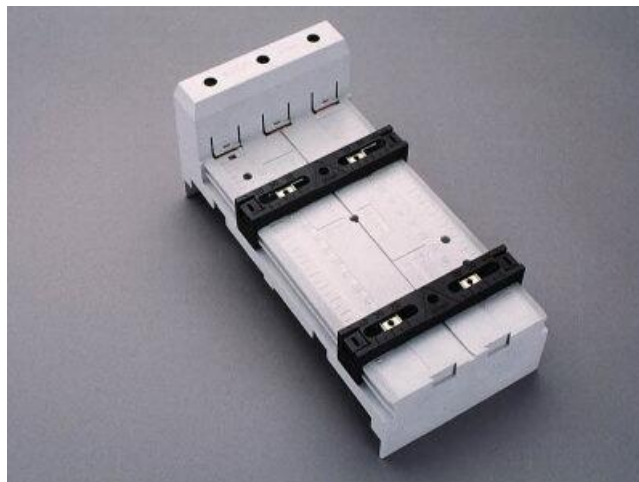


BUSBAR ADAPTERS 200 - 290A

32140000

busbar adapter 250 A, 3-pole

- Connection to the system top
- Terminals 6 - 70 mm² at top
- 3-pole
- IEC 61439-1:2011 and UL 508
- For busbars 12, 15, 20, 25, 30 x 5, 10 and section busbars

**PRODUCT DESCRIPTION****TECHNICAL DATA**

Circuit breaker modell	NZM2-XKR4O, NZM2-XKR4U
Circuit breaker supplier	Eaton
Dimensions width x height x depth	105 x 190 x 35
Nominal socket current	250 A
Number of poles	3
Pack size	1
Rated insulation voltage Ui AC	800 V
Rated surge voltage (UIMP)	6 kV
Rated voltage AC	690 V
Weight	901 g