

DATALOGIC - STAINLESS STEEL LIGHT CURTAIN SG4-H

SG4-H14-030-OO-X-G

- AISI 316L stainless steel with roughness under 0.8 micron
- IP69K full protection
- Type 4 according to EN 61496-1
- Compact profile, 50x30 mm
- Rounded surfaces with no gaps or sharp edges



PRODUCT DESCRIPTION

SG4-H safety light curtain offers finger protection with an IP69K stainless steel housing designed for the Pharma industry and a 6 metre range.


This Type 4 light curtain maintains the highest safety level according to the latest safety standards EN ISO 13849-1 and EN 62061.

SG4-H light curtain has two solid state safety outputs which are electronically monitored.


TECHNICAL DATA

Approvals	CE, cULus, TÜV
Cable length max	50 m
Contact current max	0.5 A
DC	99 %
In compliance with	EMC, LVD, MD
IP class	IP65
Material of body	Stainless steel 316L
MTTFd	444 year(s)
Number of beams	32
PL	e (EN ISO 13849-1)
Protection field	300 mm
Range	0,2-6 m

Reaction time	15 ms
SIL	3 (EN IEC 62061)
Storage temperature max	70 °C
Storage temperature min	-25 °C
T1 (Life time in years)	20
Temperature operational max	55 °C
Temperature operational min	-10 °C
Voltage tolerance	±20 %

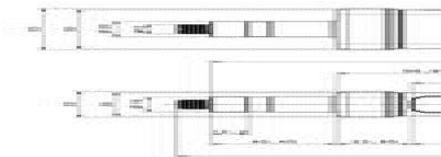


M12 4-POLE CONNECTOR

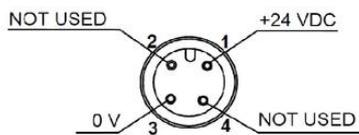


- 1 = brown = +24 VDC
- 2 = white = NOT USED
- 3 = blue = 0 V
- 4 = black = NOT USED


M12 5-POLE CONNECTOR

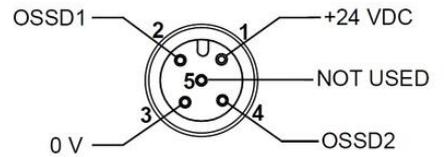

- 1 = brown = +24 VDC
- 2 = white = OSSD 1
- 3 = blue = 0 V
- 4 = black = OSSD 2
- 5 = grey = NOT USED

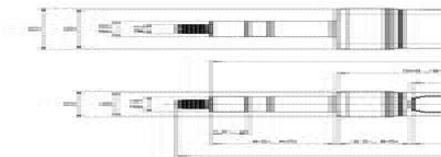


M12 4-POLE CONNECTOR

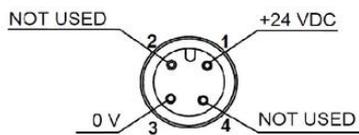

- 1 = brown = +24 VDC
- 2 = white = NOT USED
- 3 = blue = 0 V
- 4 = black = NOT USED

M12 5-POLE CONNECTOR

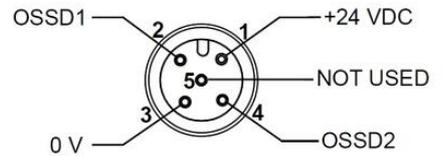

- 1 = brown = +24 VDC
- 2 = white = OSSD 1
- 3 = blue = 0 V
- 4 = black = OSSD 2
- 5 = grey = NOT USED