

## DATALOGIC - SG4-BODY COMPACT BASE

SG4-S2-050-PP-E  
SG4-S2-050-PP-E 2 Beam Type 4

- Body protection (2, 3 and 4 beam), Type 4, PL e
- Range 0.5-50 m
- Protective height 500-800-900-1200 mm



### PRODUCT DESCRIPTION

Datalogic safety light curtain SG4-BODY COMPACT Base is made for body detection with a range of up to 50 meters. The safety light curtain is available as type 4, and maintains highest level PL e according to the latest safety standards, EN ISO 13849-1 and EN 62061.

SG4-BODY COMPACT Base has a compact housing with basic functions as integrated manual reset /automatic reset and input for monitoring of external contactors (EDM). Configurations will be made by DIP switches.

SG4-BODY COMPACT models are provided in 2 different versions: Base and Muting.



SG4-BODY COMPACT Base safety light curtain include two safe electronic short-circuit detection outputs (PNP). If potential free contacts are needed We can offer forexample Datalogic safety relay CSME. Safety light curtain supplied complete with standard bracket.

Datalogic has a 3 year warranty for safety light curtains.



### TECHNICAL DATA

<b>Additional features</b>	EDM, reset functions
<b>Approvals</b>	CE, cULus, TÜV
<b>Cable connection receiver</b>	M12, 8-pole
<b>Cable connection transmitter</b>	M12, 5-pole
<b>Cable length max</b>	50 m
<b>Contact current max</b>	0.5 A
<b>DC</b>	98,90%
<b>Function</b>	EDM, Manual/automatic restart
<b>In compliance with</b>	EMC, LVD, MD
<b>IP class</b>	IP65

Material of body	Aluminium
MTTFd	384 year(s)
Number of beams	2
Output	2xPNP
PL	e (EN ISO 13849-1)
Power consumption	Transmitter 1,6W. Receiver 4,2 W. (without load)
Protection height	500 mm
Reaction time	14 ms
Safe outputs	2 OSSD
Sensing distance	0,5-50 m
SFF	0.9892999999999996
SIL	3 (EN IEC 61508)
Storage temperature max	70 °C
Storage temperature min	-25 °C
Supply voltage	24 V DC
T1 (Life time in years)	20
Temperature operational max	55 °C
Temperature operational min	-10 °C
Type	4
Voltage tolerance	±20 %

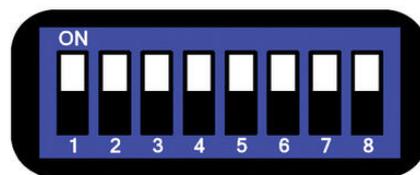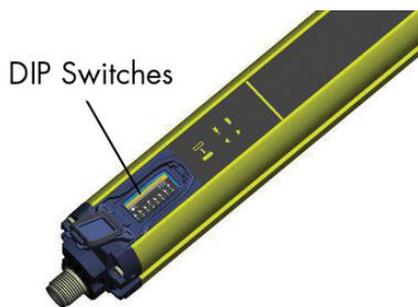

dip-sw	Function	ON	OFF
1,5	-	-	-
2,6	-	-	-
3,7	EDM	Deactivated	Activated
4,8	Reset	Automatic	Manual



- 1 = white = TEST/START
- 2 = brown = +24 Vdc
- 3 = green = NOT USED
- 4 = yellow = EDM
- 5 = grey = OSSD1
- 6 = pink = OSSD2
- 7 = blue = 0 V
- 8 = red = NOT USED

- 1 = brown = +24 Vdc
- 2 = white = NOT USED
- 3 = blue = 0 V
- 4 = black = NOT USED

