

## DATALOGIC - SAFE PHOTO CAMERA S5 / SL5

S5-5-G8-62-SG-ST4  
 Safety photocell, transmitter, 0-8m




- Range up to 40 m
- Type 4, SIL3, PL e
- Working temperature down to -25 °C

### PRODUCT DESCRIPTION

## TECHNICAL DATA

Approvals	CE
In compliance with	EMC, LVD, MD
IP class	IP67
Material of body	PBT, PMMA
Output	PNP
Range	0-8 m
Reaction time	1 ms
Sensing distance	8 m
Storage temperature max	70 °C
Storage temperature min	-25 °C
Supply voltage	24 V DC
Temperature operational max	55 °C
Temperature operational min	-25 °C
Type of light	IR LED
Voltage tolerance	±15 %

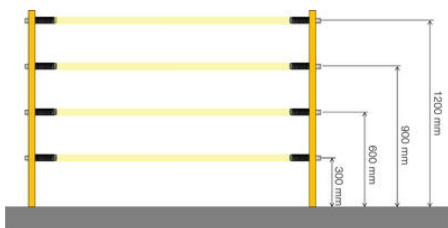

S5-5-G8-62-SG-ST4

