OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

DATALOGIC - SAFE PHOTO CAMERA S5 / SL5

SL5-5-G-82-SG-ST4
Safety photocell, transmitter, 40m




- Range up to 40 m
- Type 4, SIL3, PL e
- Working temperature down to -25 ºC


PRODUCT DESCRIPTION


TECHNICAL DATA


Supply voltage	24 V DC
Output	PNP
Type of light	Laser
IP class	IP67
Reaction time	1 ms
Material of body	ABS plastic, PMMA
Temperature operational max	55 °C
Temperature operational min	-25 °C
Storage temperature max	70 °C
Storage temperature min	-25 °C
Approvals	CE
Sensing distance	40 m
Range	0-40 m

Voltage tolerance	±15 %
In compliance with	EMC, LVD, MD

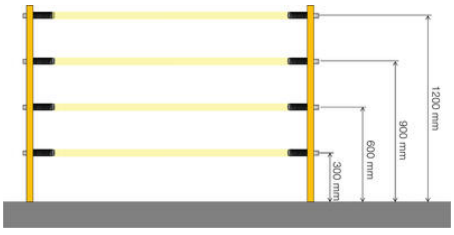

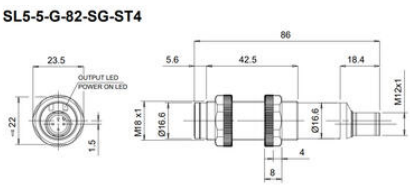

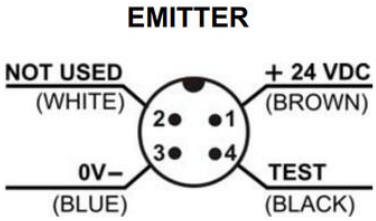

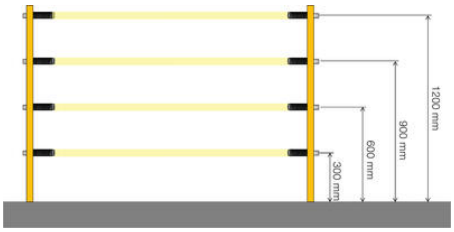
1200 mm
900 mm
600 mm
300 mm