

## DATALOGIC - PROTECTIVE HOUSING SG-IP69K

SG-IP69K-2-050  
95ASE1410 IP69K Prot Tubes for 500mm 2-Beam Light  
Curtains

- IP69K protective housing
- Available for heights 150–1800 mm
- Installation by user



### PRODUCT DESCRIPTION


Datalogic SG-IP69K protective housing is a PMMA acrylic tube to protect and seal light curtains of SG2-B, SG2-E, SG4-B and SG BODY COMPACT series. Thanks to SG-IP69K accessory the IP protection of the light curtain is increased from IP65 to IP67, IP68 and IP69K.


The Gore-Tex membrane on the caps prevents water or dirt entering as well as internal condensation. The connection cable for the light curtain is protected and kept in its place by a M16 metric chock that prevents the entry of water or dirt.

The SG-IP69K accessory is particularly suitable where high levels of humidity and temperature are present and machines or equipments are frequently washed with hot water (up to 80°C) at high pressure (up to 100 bars) and/or cleaned with detergents.



SG-IP69K is particularly suitable for FOOD industry applications:

- beverage production
- meat slaughter
- sausage production
- milk/cheese industry

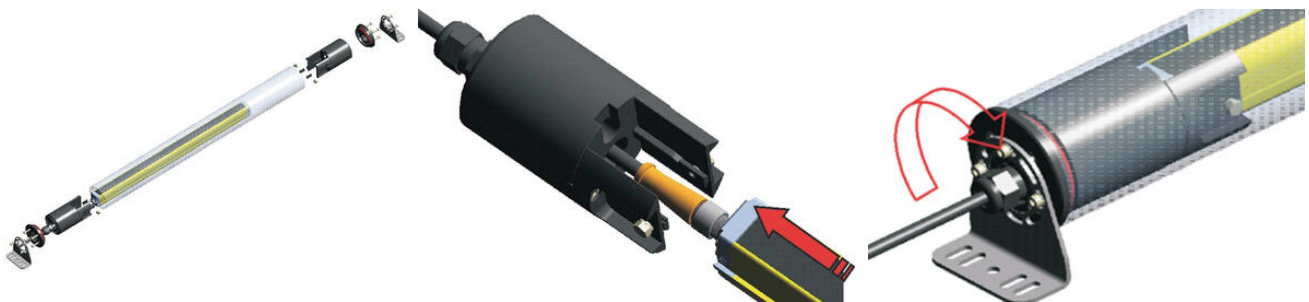



MODEL	L (mm)
SS-IPW-N 100	275.5
SS-IPW-N 300	535.7
SS-IPW-N 450	675.8
SS-IPW-N 600	820.7
SS-IPW-N 750	975.5
SS-IPW-N 900	1130.7
SS-IPW-N 1050	1275.7
SS-IPW-N 1200	1420.8
SS-IPW-N 1350	1575.7
SS-IPW-N 1500	1730.8
SS-IPW-N 1650	1875.9
SS-IPW-N 1800	2030.8
SS-IPW-N 2-090	915
SS-IPW-N 2-1000	1115
SS-IPW-N 4-090	1213.5
SS-IPW-N 4-120	1613.5

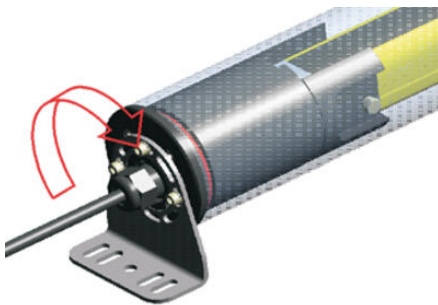

MODEL	L (mm)
SS-IPW-N 100	275.5
SS-IPW-N 300	535.7
SS-IPW-N 450	675.8
SS-IPW-N 600	820.7
SS-IPW-N 750	975.5
SS-IPW-N 900	1130.7
SS-IPW-N 1050	1275.7
SS-IPW-N 1200	1420.8
SS-IPW-N 1350	1575.7
SS-IPW-N 1500	1730.8
SS-IPW-N 1650	1875.9
SS-IPW-N 1800	2030.8
SS-IPW-N 2-090	915
SS-IPW-N 2-1000	1115
SS-IPW-N 4-090	1213.5
SS-IPW-N 4-120	1613.5