OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

USB CONNECTORS

490113.0080
Panel mount connector, USB-3.0, Type A/A, 0.8m cable



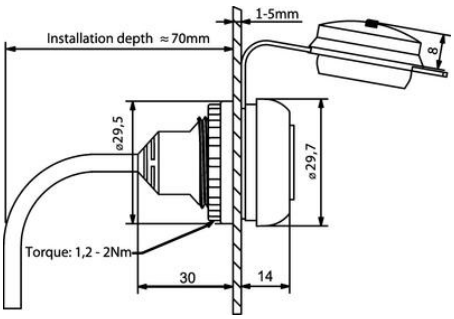
- IP65 rating, protection from dust and water jets
- Various cable lengths
- Wide operating temperature range of -5°C and +70°C

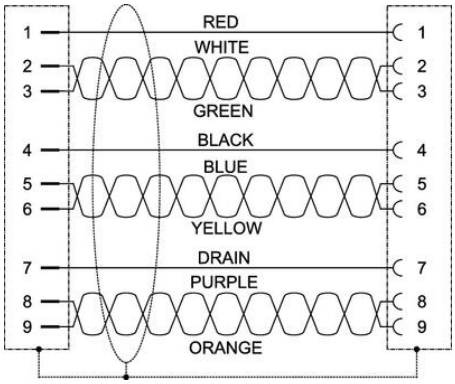
PRODUCT DESCRIPTION

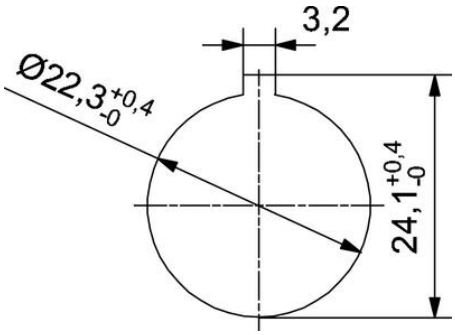
Lutze panel mount sockets are great for adding a USB A connection to an electrical cabinet, control panel or distribution board. Rated at IP65, these sockets are robust and perfect for an industrial environment. The sockets include a protective cap, have a wide operating temperature range between -5°C and +70°C and are available in various cable lengths.

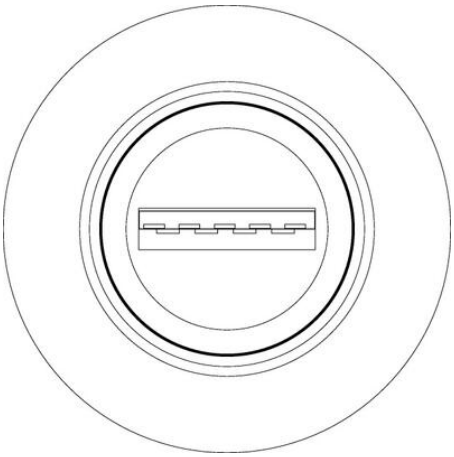
TECHNICAL DATA

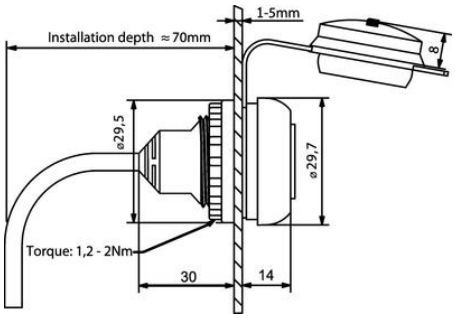
Approvals	cULus
Colour	Black
Contact material	Gold plated
Depth	70 mm
IP class	IP20, IP65
Material	PA, PVC
Number of contacts	9
Rated current	0.9 A
Storage temperature max	80 °C
Storage temperature min	-25 °C
Temperature operational max	70 °C
Temperature operational min	-5 °C
Voltage max	30 V

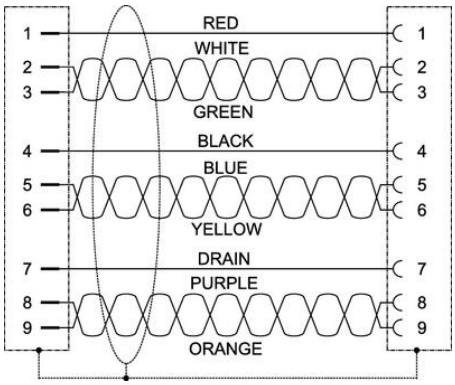

1-5mm
Installation depth ≈70mm
8
ø29,5
ø29,7
Torque: 1,2 - 2Nm
30
14

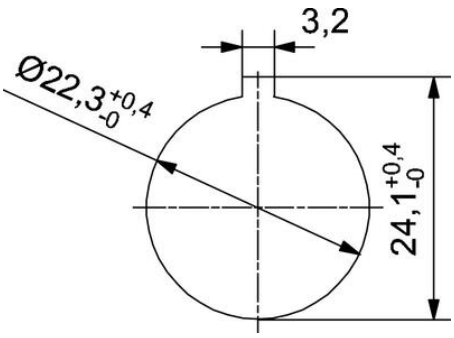

1
2
3
4
5
6
7
8
9
RED
WHITE
GREEN
BLACK
BLUE
YELLOW
DRAIN
PURPLE
ORANGE


3,2
Ø22,3+0,4 -0
24,1+0,4 -0




1-5mm
Installation depth ≈70mm
8
ø29,5
ø29,7
Torque: 1,2 - 2Nm
30
14


1
2
3
4
5
6
7
8
9
RED
WHITE
GREEN
BLACK
BLUE
YELLOW
DRAIN
PURPLE
ORANGE


3,2
Ø22,3+0,4 -0
24,1+0,4 -0

