


PANEL MOUNT FEED-THROUGH TERMINALS SDK 4 -16 MM²

SDK Series

17444.6

SDK 10-DPA, Outer spacer plate for SDK 10/1A/1L

- 32A to 57A, 250V-1000V
- Polyamide 6.6 UL94-V0
- Easy to align side-by-side
- Secure and robust mounting
- Custom colours available

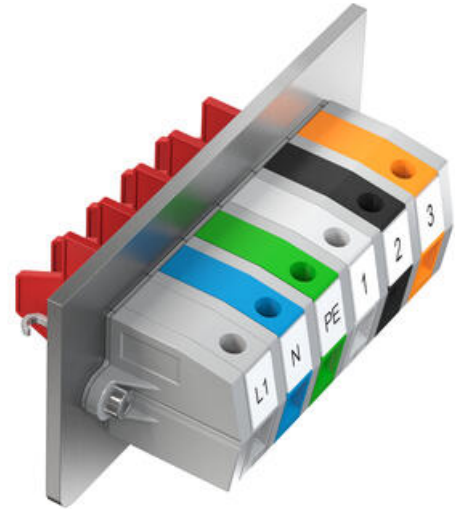

PRODUCT DESCRIPTION

The SDK series is a panel feed-through terminal system designed for use in a wide range of applications including electrical device and enclosure technologies.

This range of terminals provide a flexible modular-based system where a more robust and secure connection is required.

The wide range of system components can be combined to achieve various voltages – with a maximum voltage level of 1000 V (UL 600 V) even at Contamination degree 3.

The insulated housing is made of polyamide 6.6 UL 94 V-0. The pegs can be used to link the housings together to form multi-pole units. Optional additional flange plates are available for further improved mechanical stability.

The standard range of PMC SB or PMC BSTR marker tags can be used to label the feed-through terminals.

TECHNICAL DATA

Additional information	distance plate outer side
Colour	Grey
Country of origin	DE
Flammability class	UL94-V0
Height	32.6 mm
Length	32.87 mm
Material	Polyamide 6.6
Operating temperature from	-40 °C
Operating temperature to	120 °C
Pack size	50
Tariff code	85369010
Weight	1.44 g
Width	3 mm