

## KUEBLER - WIRE ENCODERS C100

### SERIE D8.C100

- Robust design
- -40 to +85°C
- IP67 class
- Built-in inclinometer



### PRODUCT DESCRIPTION

Thanks to its robust design, wide temperature range, and IP67 rating, the C100 series fits well in demanding applications. The C100 can be equipped with analog, incremental, relay and switched outputs, and even with built-in inclinometers together with CANopen communication.

It is also possible to order the C100 series with redundancy.

The measuring range may range from 1m up to 5m.

Please refer to the images below for ordering information.

Order code with analog sensor		D8. C100 . XXXX . XXX 1 . X 000			
a	b	c	d		
<b>Measuring length</b>	<b>Sensor type</b>	<b>Type of connection</b>	<b>Power supply</b>		
0100 = 1 m	A22 = 0 ... 10 V <sup>1)</sup>	1 = M12 connector, 5-pin	1 = 9 ... 30 V DC		
0200 = 2 m	A44 = 0.5 ... 4.5 V		2 = 5 V DC <sup>2)</sup>		
0300 = 3 m	R22 = 0 ... 10 V, redundant <sup>1)</sup>				
0400 = 4 m	R44 = 0.5 ... 4.5 V, redundant				
0500 = 5 m					

Order code with CANopen and inclinometer		D8. C100 . XXXX . RC1 1 . 1 X 00				
a	b	c	d	e		
<b>Measuring length</b>	<b>Sensor type</b>	<b>Type of connection</b>	<b>Power supply</b>	<b>Inclinometers</b>		
0100 = 1 m	RC1 = CANopen redundant	1 = M12 connector, 5-pin	1 = 9 ... 30 V DC	0 = none		
0200 = 2 m				1 = 1 inclinometer		
0300 = 3 m				2 = 2 inclinometers		
0400 = 4 m						
0500 = 5 m						

Order code with incremental output		D8. C100 . XXXX . XXX X . 1 000			
a	b	c	d		
<b>Measuring length</b>	<b>Sensor type</b>	<b>Type of connection</b>	<b>Output circuit / Power supply</b>		
0100 = 1 m	I11 = incremental AB, 512 ppr	1 = M12 connector, 5-pin	1 = TTL / 9 ... 30 V DC		
0200 = 2 m	I12 = incremental ABZ, 512 ppr	3 = radial cable, 2 m [6.56']			
0300 = 3 m	I21 = incremental AB, 1024 ppr				
0400 = 4 m	I22 = incremental ABZ, 1024 ppr				
0500 = 5 m					

Order code with relais output

D8.	C100.	XXXX.	RL1	1.	1	000
			a	b	c	d

**a** Measuring length

0100 = 1 m  
0200 = 2 m  
0300 = 3 m  
0400 = 4 m  
0500 = 5 m

**b** Sensor type

RL1 = relay output

**c** Type of connection

1 = M12 connector, 5-pin

**d** Power supply

1 = 9 ... 30 V DC

Order code with switch output

D8.	C100.	XXXX.	SW3	4.	1	000
			a	b	c	d

**a** Measuring length

0100 = 1 m  
0200 = 2 m  
0300 = 3 m  
0400 = 4 m  
0500 = 5 m

**b** Sensor type

SW3 = 3 switch outputs

**c** Type of connection


4 = M12 connector, 12-pin

**d** Power supply

1 = 9 ... 30 V DC

Dimensions


(Dimensions in mm (inch))

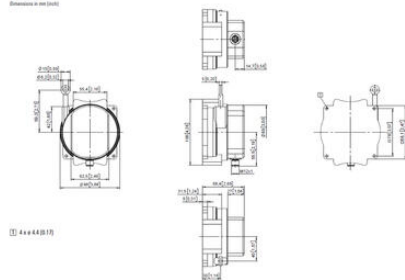

II 4144B10

Dimensions

(Dimensions in mm (inch))

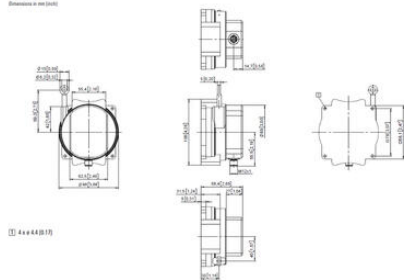

II 4144B10