


KUEBLER - INCREMENTAL PULSE TRANSDUCER, STAINLESS STEEL, SENDIX 5006/5026

SERIE 5006

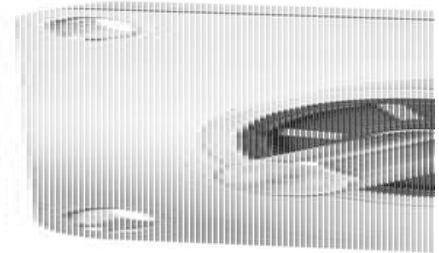

- Housing diameter Ø58 mm
- stainless steel housing
- Axle seal in Viton® from DuPont®
- Temperature range -40 to +85 °C

PRODUCT DESCRIPTION

Sendix 5006/5026 is a robust incremental shaft sensor specially designed for industrial use outdoors or in the food industry. The shaft seal is in Viton® material from DuPont. Viton® is specially designed to cope with chemical impact. With its powerful housing, the sensor is more protected from impact and impact than previous models in the 58XX series. With the new Safety-Lock™ construction, the bearings in the angle sensor have been placed with a larger line spacing and a special locking latch that prevents stock displacement in any direction.

The sensor comes with shaft and hole shaft, in combination with several different flanges to fit where 58mm sensors have previously been sitting.


Please refer to the images below for ordering information.

Order code	8.5006	. XXXX4 .	XXXX
Shaft version	Type	a b c d	e
a Flange		c Output circuit / power supply	<i>Optional on request</i>
7 = clamping flange ø 58 mm [2.28"]		2 = push-pull (7272 compatible with inverted signal) / 5 ... 30 V DC	- other pulse rates
A = synchro flange ø 58 mm [2.28"]		5 = push-pull (with inverted signal) / 10 ... 30 V DC	- Ex 2/22
C = square flange □ 63.5 mm [2.5"]		4 = RS422 (with inverted signal) / 5 V DC	- seawater resistant (stainless steel V4A)
b Shaft (ø x L), with flat		d Type of connection	<i>Stainless steel V4A as standard types (deliverable as from 1 unit)</i>
1 = ø 6 x 10 mm [0.24 x 0.39"]		4 = radial M12 connector, 8-pin	8.5006.73X4.XXXX-V4A
3 = ø 10 x 20 mm [0.39 x 0.79"]		e Pulse rate	V4A
8 = ø 3/8" x 7/8"		1, 5, 10, 12, 36, 100, 200, 250, 256, 360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 2000, 2048, 2500, 3600, 4096, 5000 (e.g. 100 pulses => 0100)	1.4404

Order code	8.5026	. XXXX2 .	XXXX
Hollow shaft	Type	a b c d	e
a Flange		c Output circuit / power supply	<i>Optional on request</i>
1 = with spring element, long		2 = push-pull (7272 compatible, with inverted signal) / 5 ... 30 V DC	- other pulse rates
C = with stator coupling, ø 63 mm		5 = push-pull (with inverted signal) / 10 ... 30 V DC	- Ex 2/22
b Through hollow shaft		4 = RS422 (with inverted signal) / 5 V DC	- seawater resistant (stainless steel V4A)
2 = ø 1/4"		d Type of connection	<i>Stainless steel V4A as standard types (deliverable as from 1 unit)</i>
4 = ø 3/8"		2 = radial M12 connector, 8-pin	8.5026.18X2.XXXX-V4A
3 = ø 10 mm [0.39"]		e Pulse rate	V4A
5 = ø 12 mm [0.47"]		1, 5, 10, 12, 36, 100, 200, 250, 256, 360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 2000, 2048, 2500, 3600, 4096, 5000 (e.g. 100 pulses => 0100)	1.4404
6 = ø 1/2"			
8 = ø 15 mm [0.59"]			

TECHNICAL DATA

Connection	M12
Housing diameter	58 mm
IP class	IP66, IP67
Mounting	Shoulder
Output	Push/Pull, RS422
Pulse max	5000
Sensor type	Incremental
Shaft diameter max	10 mm
Shaft diameter min	6 mm
Supply voltage dc max	30 V DC
Supply voltage dc min	5 V DC
Temperature operational max	85 °C
Temperature operational min	-40 °C
Version	Multiturn

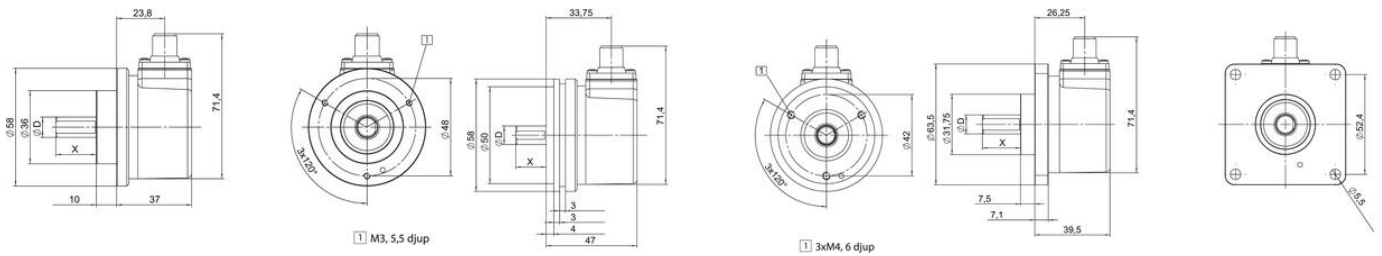

Terminal assignment

Output circuit	Type of connection	M12 connector, 8 pin
2, 4, 5	0006-4	Signal: 0V -V+ A A B B 0 0 1
	0006-2	Pin: 1 2 3 4 5 6 7 8 HW

0V: Encoder power supply +V DC
 +V: Encoder power supply ground GND (0V)
 A, B: Incremental output channel A
 B, B: Incremental output channel B
 0, 0: Reference signal
 PH: Plug connector housing (shield)

Top view of mating side, male contact base



M12 connector, 8 pin

Terminal assignment

Output circuit	Type of connection	M12 connector, 8 pin
2, 4, 5	0006-4	Signal: 0V -V+ A A B B 0 0 1
	0006-2	Pin: 1 2 3 4 5 6 7 8 HW

0V: Encoder power supply +V DC
 +V: Encoder power supply ground GND (0V)
 A, B: Incremental output channel A
 B, B: Incremental output channel B
 0, 0: Reference signal
 PH: Plug connector housing (shield)

Top view of mating side, male contact base



M12 connector, 8 pin