

POWER SUPPLY 1-PHASE, 24 V DC DIMENSION Q SERIES, 3.4 AND 5A

QS5.241

PSU 100-240V ac I/P 24V dc 5A 120W O/P

- Output currents of 3.4 and 5 A
- Up to 90% efficiency
- 50% bonus power up to 4 seconds
- Spring clamp terminals



PRODUCT DESCRIPTION

The most outstanding features of this Dimension Q-Series DIN-rail power supply are the high efficiency and the small size, which are achieved by a synchronous rectification and further novel design details. The Q-Series is part of the Dimension family, existing alongside the lower featured C-Series. With short-term peak power capability of 150% and built-in large sized output capacitors, these features help start motors, charge capacitors and absorb reverse energy and often allow a unit of a lower wattage class to be used. High immunity to transients and power surges as well as low electromagnetic emission makes usage in nearly every environment possible. Unique quick-connect spring-clamp terminals allow a safe and fast installation and a large international approval package for a variety of applications makes this unit suitable for nearly every situation.

- AC 100-240V Wide-range Input
- Width only 40mm
- Efficiency up to 92.7%
- 150% Peak Load Capability
- Easy Fuse Tripping due to High Overload Current
- Active Power Factor Correction (PFC)
- DC Input from 88 to 360Vdc
- Negligible low Inrush Current Surge
- Short-term Operation down to 60Vac and up to 300Vac
- Full Power Between -25°C and +60°C
- DC-OK Relay Contact
- Quick-connect Spring-clamp Terminals
- 3 Year Warranty

TECHNICAL DATA

INPUT DATA

Input voltage ac	100-240 V
Input voltage ac min	85 V AC
Input voltage ac max	264 V AC
Input voltage dc	110-300 V
Input voltage dc min	88 V DC

Input voltage dc max	360 V DC
Inrush current at 120 V ac typical	9 A
Inrush current at 230 V ac typical	11 A
Input voltage range	Wide-range
Power factor at 120 V ac, full load. Typical	0.99
Power factor at 230 V ac, full load. Typical	0.91
Number of phases	1

OUTPUT DATA

Output voltage	24 V DC
Output voltage min	24 V DC
Output voltage max	28 V DC
Output current	5 A
Power	120 W

EFFICIENCY / LIFETIME / MTBF

Efficiency at 120 V ac, full load, typical	91.6 %
Efficiency at 230 V ac, typical	90.3 %
Efficiency at 230 V ac, full load, typical	92.7 %
Lifetime at 120 V ac, full load and +40 ° C	70000 h
Lifetime at 230 V ac, full load and +40 ° C	89000 h
MTBF (IEC 61709) 230 V ac, max load, 40 ° C	831000 h

DIMENSIONS

Width	40 mm
Height	124 mm
Depth	117 mm
Weight	0.62 kg

OTHER

Approvals	ABS, CB, CE, CSA, GL, UL
Hold time at 120 V ac, typical full load	34 ms
Hold time at 230 V ac, typical full load	65 ms
IP class	IP20
Clamp type	Spring-clamp
Material protection	Aluminium
Supply frequency	50-60 ±6 %

Ripple max	50 mV pp
Series	Dimension Q
Power consumption 120 V ac	1.1 A
Power consumption 230 V ac	0.62 A
Power drop from +60 °C to + 70 °C	3 W/°C
Temperature min without derating	-25 °C
Temperature max without derating	60 °C
Type Power Supply	AC-DC
Active Transient	Yes
DC relay output	Yes

Fig. 6-1 Output voltage vs. output current, typ.

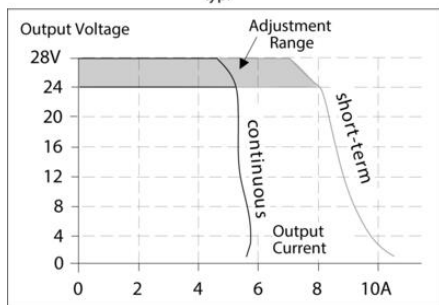


Fig. 15-1 Output current vs. ambient temp.

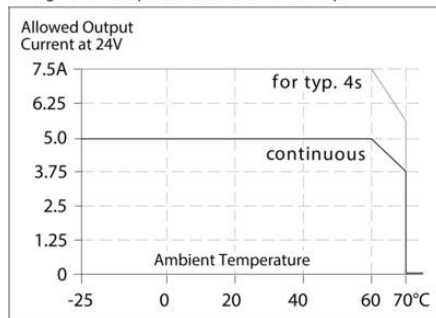


Fig. 9-2 Losses vs. output current at 24V, typ.

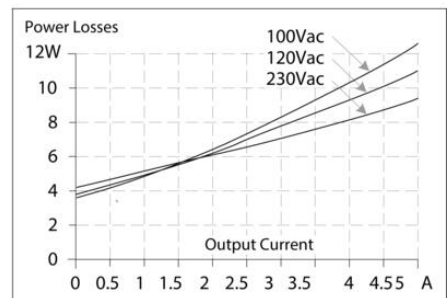


Fig. 9-1 Efficiency vs. output current at 24V, typ.


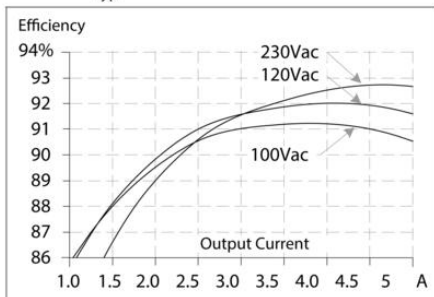


Fig. 6-2 Bonus time vs. output power

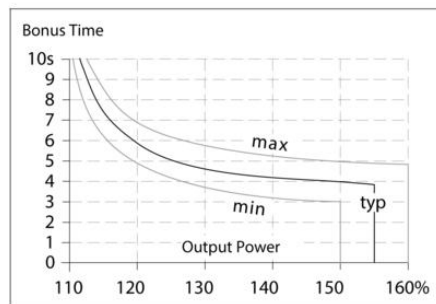

Maximal wire length *) for a fast (magnetic) tripping:

	0.75mm ²	1.0mm ²	1.5mm ²	2.5mm ²
C-2A	15m	20m	26m	48m
C-3A	9m	14m	22m	33m
C-4A	4m	5m	7m	10m
C-6A	-	1m	1m	1m
B-6A	4m	7m	9m	11m



Fig. 22-1 Front view

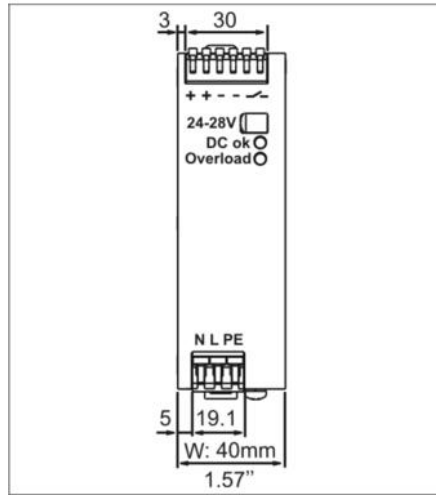


Fig. 22-2 Side view

