

## POWER SUPPLY 1-PHASE, 24 V DC PIANO, 20A

PIC480.241C

PSU 200-240V ac I/P 24V dc 20A 480W O/P

- Output current of 20 A
- Width 49mm
- Efficiency up to 95,7%
- DC-OK relay



### PRODUCT DESCRIPTION

## TECHNICAL DATA

### INPUT DATA

Input voltage ac	200-240 V
Input voltage ac min	180 V AC
Input voltage ac max	264 V AC
Inrush current at 230 V ac typical	26 A
Power factor at 230 V ac, full load. Typical	0.99
Number of phases	1

### OUTPUT DATA

Output voltage	24 V DC
Output voltage min	24 V DC
Output voltage max	28 V DC
Output current	20 A
Power	480 W

### EFFICIENCY / LIFETIME / MTBF

Efficiency at 230 V ac, typical	95.2 %
---------------------------------	--------

Efficiency at 230 V ac, full load, typical	95.7 %
Lifetime at 230 V ac, full load and +40 ° C	51000 h
MTBF (IEC 61709) 230 V ac, max load, 40 ° C	482000 h

## DIMENSIONS

Width	49 mm
Height	124 mm
Depth	124 mm
Weight	0.62 kg

## OTHER

Approvals	CB, CE, cRUus, cULus
Hold time at 230 V ac, typical full load	30 ms
IP class	IP20
Clamp type	Screw
Cable connection	Screw max 6 mm <sup>2</sup> solid, 4 mm <sup>2</sup> stranded
Load regulation	<150 mV (0-20 A)
Material protection	Polycarbonate
Supply frequency	50-60 ±6 %
Parallel connection for increased current	Not allowed
PFA (EN61000-3-2)	Fulfilled (Class A)
Primary fuse	Min 10A B type or 6A C type
Ripple max	100 mV pp
Series	Piano
Series connection for increased voltage	Yes
Power consumption 230 V ac	2.2 A
Power drop from +60 °C to + 70 °C	8 W/°C
Temperature min without derating	-25 °C
Temperature max without derating	55 °C
Transient	VDE 0160 (750 V, 0,3 ms)
Type Power Supply	AC-DC
DC relay output	Yes






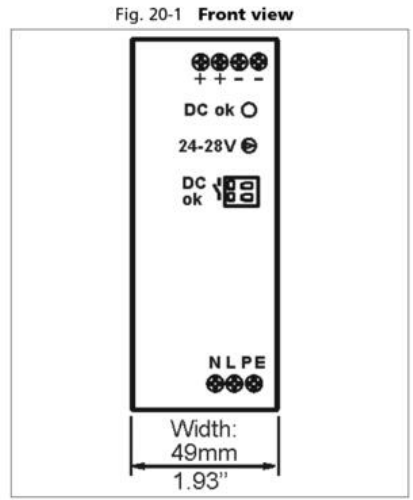


Fig. 20-3 Side view

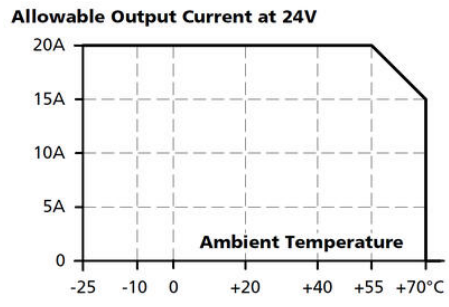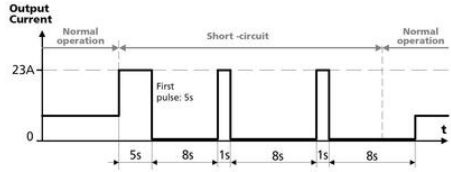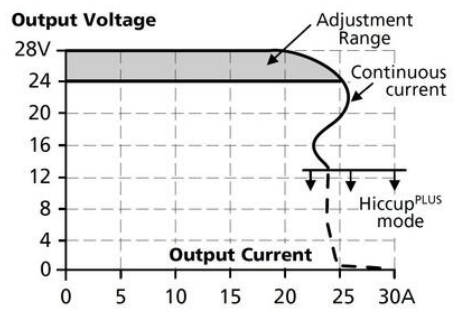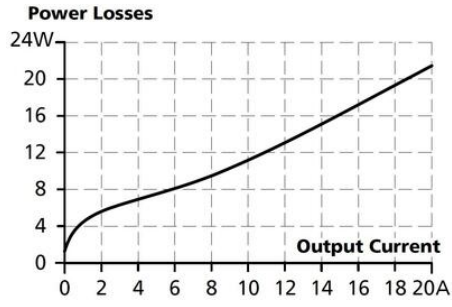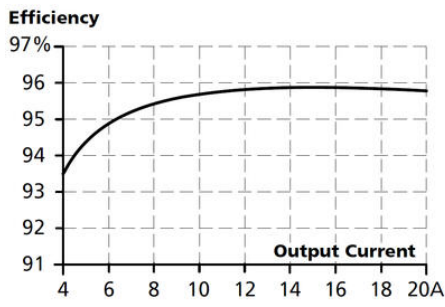