

MINIMOTOR - AMSSE110 STAINLESS STEEL MOTOR WITH PLANETARY GEAR BOX

AMSSE110 110 104M-600

- IP69K sealing
- Full stainless steel outer parts
- Up to 109.4Nm rated torque
- Brushless AC with resolver feedback



PRODUCT DESCRIPTION

MOTOR:

Brushless three-phase 4-pole motor, totally enclosed. Rotor with NdFeB magnets. Thermal cutoff. Winding Class H. Protection IP69K in compliance with IEC/EN 60529 standards. 2-Pole resolver feedback. Bearings with reduced backlash with special grease and high-temperature rubber seal rings. Easy and quick to clean thanks to the smooth surface design. Power 740 W.


GEAR UNIT:

Planetary with stainless steel gearcase. Seal rings in special high-temperature rubber. Lubrication with special long-lasting oil for use with foodstuffs (H1). There are 4 available gear ratios with 1 or 2 stages (i), from 5 to 49. Rated torque up to 109.4 Nm.

Designed as per EHEDG hygiene guidelines requirements.
ALWAYS specify application environment

TECHNICAL DATA

Nominal speed	600 rpm
Nominal torque	11.4
Ratio	5:1

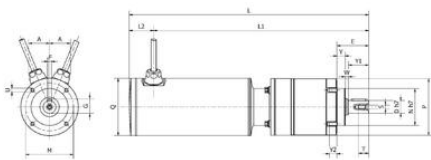

AMSSSE 110

Type	A	D	E	F	G	L	L1	L2	M	N	P	Q	S	T	U	W	Y1	Y2	Mean diameter of shaft mm Fr.	
104M 1 STADIO	34	25	66,5	8	28	479	468	39	90	65	109	120	M10	22	M8	8	14	45	20	18,9
104M 2 STADQ	34	25	67	8	28	507	440	39	90	65	109	120	M10	22	M8	8	14	45	20	21,2

DCU model selection

Electric motors

10.06.2017

Inverted motor

10.06.2017

Worm gearmotors

10.06.2017

Inhalers sensors

10.06.2017


Clean products

10.06.2017

Drives

10.06.2017

Please see product description above for 2D and 3D drawings

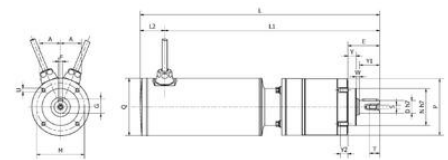

AMSSSE 110

Type	A	D	E	F	G	L	L1	L2	M	N	P	Q	S	T	U	W	Y1	Y2	Mean diameter of shaft mm Fr.	
104M 1 STADIO	34	25	66,5	8	28	479	468	39	90	65	109	120	M10	22	M8	8	14	45	20	18,9
104M 2 STADQ	34	25	67	8	28	507	440	39	90	65	109	120	M10	22	M8	8	14	45	20	21,2

DCU model selection

Electric motors

10.06.2017

Inverted motor

10.06.2017

Worm gearmotors

10.06.2017

Inhalers sensors

10.06.2017

Clean products

10.06.2017

Drives

10.06.2017

Please see product description above for 2D and 3D drawings