



HG-PET025

0239.609.022



- Low weight, low volume, high flexibility
- Self-extinguishing (DIN 75200, FMVSS 302)
- 100 % recyclable
- Ideal for electric vehicles

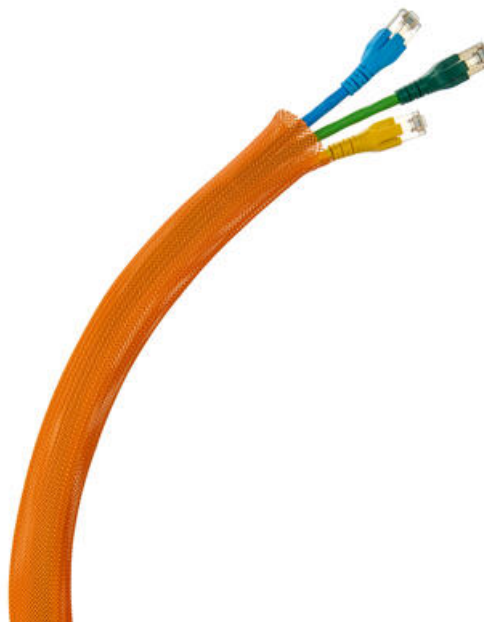

PRODUCT DESCRIPTION

Wire braiding for use in electric vehicles, composed of round braided monofilaments with double crossed looping at various braiding angles and achieves coverage of over 85%. Ideal for use in engine compartments, vehicle interiors, underbody areas and bodywork.

TECHNICAL DATA

Approvals	DIN 5510-2, DIN 75200, FMVSS 302, DIN 5510-1
Colour	Orange
Nominal diameter (NW)	14 mm
Operative range	10-22 mm
Pack size	100 m
Temperature operational max	150 °C
Temperature operational min	-55 °C
Weight	0.011 kg/m