
OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

HG-PET025

0239.609.033
HG-PET025 NW25 LW18-33 orange

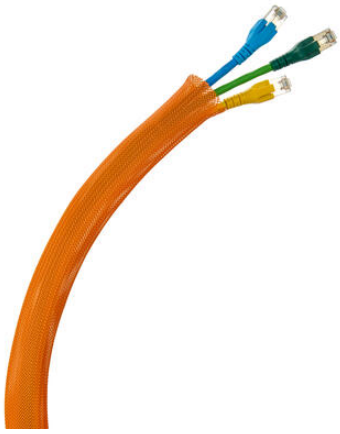

- Low weight, low volume, high flexibility
- Self-extinguishing (DIN 75200, FMVSS 302)
- 100 % recyclable
- Ideal for electric vehicles

PRODUCT DESCRIPTION

Wire braiding for use in electric vehicles, composed of round braided monofiles with double crossed looping at various braiding angles and achieves coverage of over 85%. Ideal for use in engine compartments, vehicle interiors, underbody areas and bodywork.

TECHNICAL DATA

TECHNICAL DATA

Pack size	100 m
Approvals	DIN 5510-2, DIN 75200, FMVSS 302, DIN 5510-1
Colour	Orange
Temperature operational min	-55 °C
Temperature operational max	150 °C
Weight	3 kg/m

Nominal diameter (NW)	25 mm
Operative range	18-33 mm