


DEFINOX - PRESSURE RELIEF VALVE

DE-TU051B15191

Pressure relief valve, Adjustable, 2", FKM, 3-7.5bar


- Safety valve with adjustable or fixed pressure 0-12 Bar
- Gaskets in FKM - EPDM
- 3.1 EN10204 Certificates by order
- Other connections, e.g. clamp, flanger mm.
- Standard with L-body in Aisi 316l / 1.4404

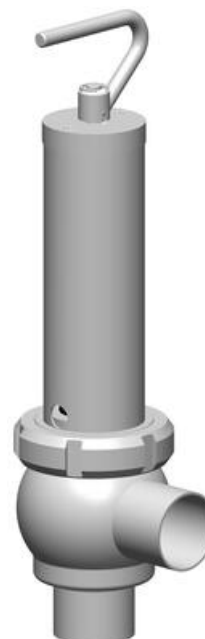



PRODUCT DESCRIPTION

TECHNICAL DATA

Certificate	3.1 EN10204
Connection type	Weld ends
Description	Adjustable valve
Design norm	SMS
Housing	L-body
Housing	FKM
Inner diameter	48.5 mm
Material quality	1.4404
Outer diameter	51 mm
Pressure range max	7.5 bar
Pressure range min	3 bar
Surface finish	RA<0,8/1,2µm
Temperature range	0°C/+120°C
Weight	4.5 kg



Hus: L form

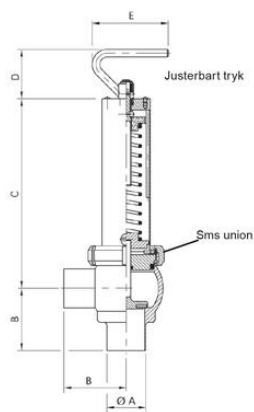

Hus: L form

