


## DEFINOX - DCX 3 & DCX 4 MINI

### Manual & Pneumatic

DE-NU025F11100

DCX3 mini, 1" L-body, Manual, PEEK/EPDM

- High packing pressure
- Independent and compact body
- Many configuration options
- Possible use on a wide range of applications

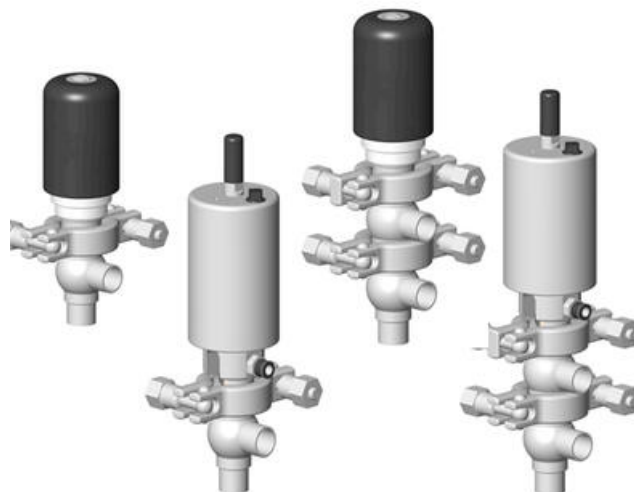

### PRODUCT DESCRIPTION

Definox Mini Seat Valves.

This seat valve design offers a wide range of options and variants.

Technical advantages:

- From 1/2" to 1"
- Fitted with PEEK plug as standard - inert to chemical products
- Welded or Clamp ends possible
- Ergonomic handle with visual opening indicator
- Elastomer seal available for charged products
- High packing pressure
- Self-contained and compact body with a wide range of configuration options:
- Possible use on a wide range of applications
- Easy and fast maintenance thanks to the clamp assembly


### TECHNICAL DATA

|                               |                             |
|-------------------------------|-----------------------------|
| <b>Certificate</b>            | 3.1 EN10204                 |
| <b>Connection type</b>        | Weld ends                   |
| <b>Description</b>            | PEEK PLUG                   |
| <b>Housing</b>                | L Body                      |
| <b>Housing</b>                | EPDM                        |
| <b>Inner diameter</b>         | 22.1 mm                     |
| <b>Material quality</b>       | 1.4404                      |
| <b>Operating pressure max</b> | 18 bar                      |
| <b>Outer diameter</b>         | 25.4 mm                     |
| <b>Surface finish</b>         | Indv.: RA 0,8µm Udv.: 1,2µm |

Temperature operational max 140 °C

Temperature operational min -5 °C

Weight 1.9 kg

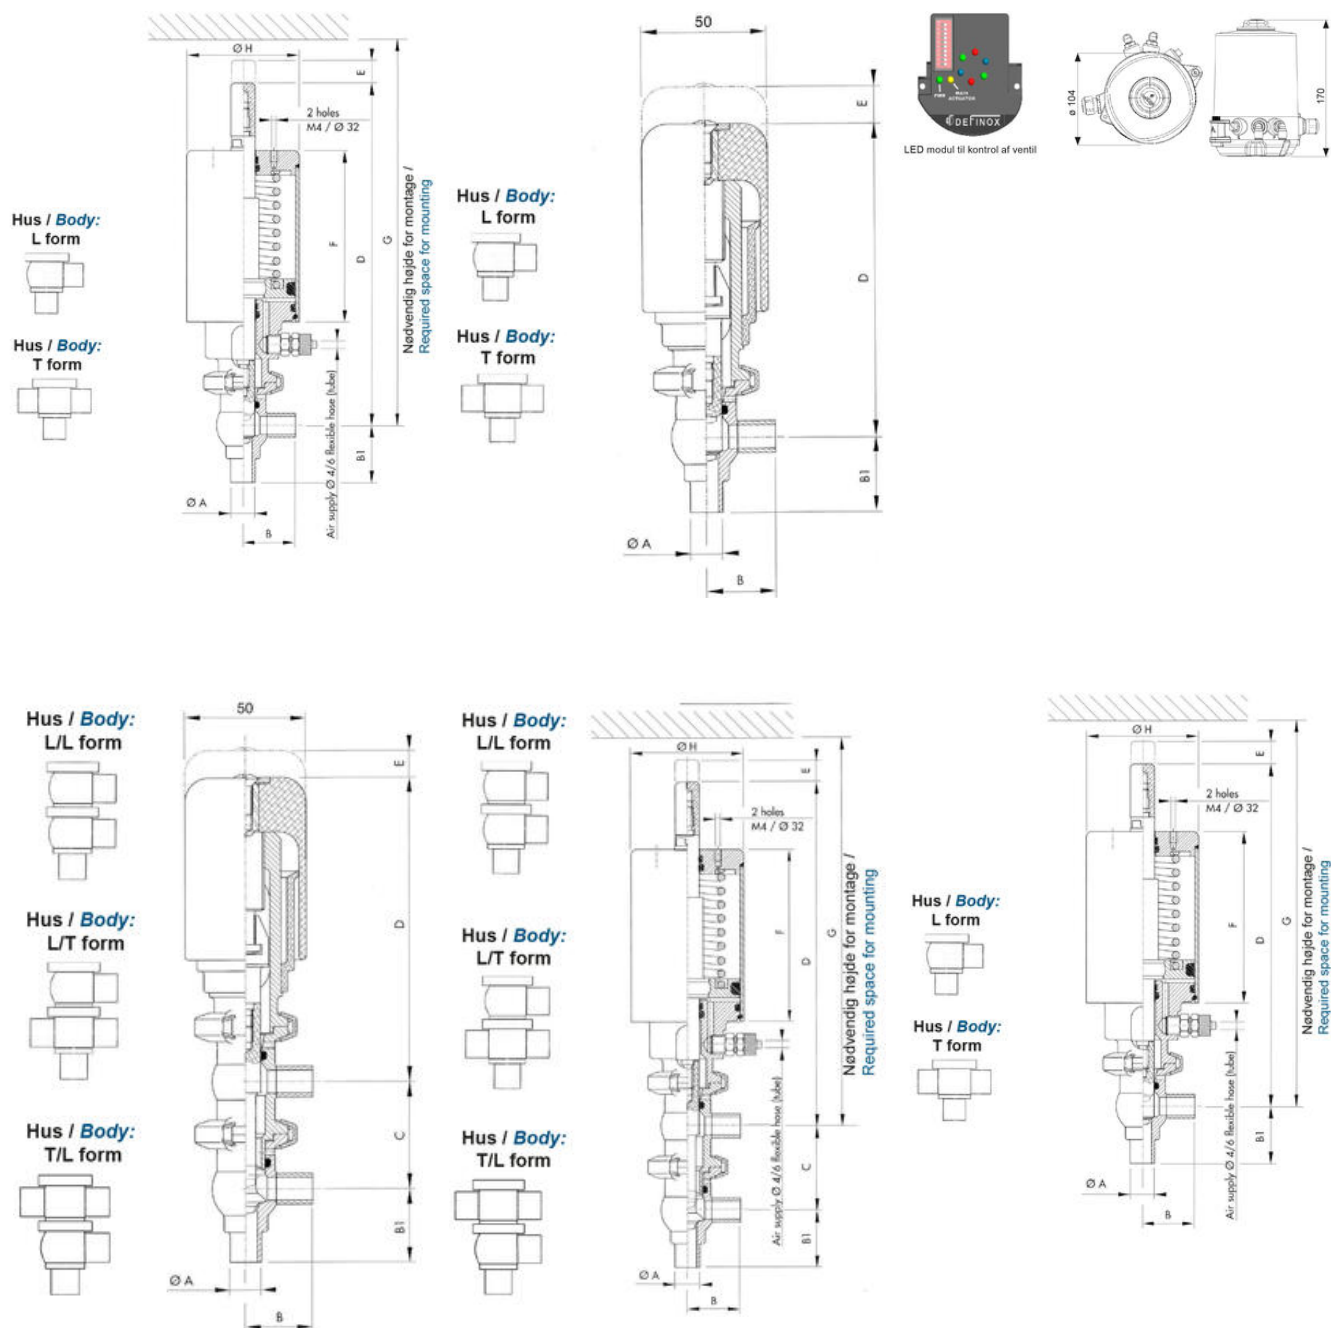

Hus / Body:  
L form

Hus / Body:  
T form



Hus / Body:  
L/L form

Hus / Body:  
L/T form

Hus / Body:  
T/L form



Hus / Body:  
L/L form

Hus / Body:  
L/T form

Hus / Body:  
T/L form

