

## GNR SERIES 90MM RELAY

GNR25ACZ  
 DIN Rail 3ph SSR 90mm 600V ac 25A, 240V ac In, ZC



- Load current 25A
- Operating Voltage 48-600 VAC
- Control Voltage 4-32 VDC, 90-140 VAC and 180-280 VAC



### PRODUCT DESCRIPTION

These relays offer a broad range of power ratings which makes them suitable for diverse applications. Their high reliability and efficient design have made of them a market favorite for many years.

- Current rating: 25 amps
- Output voltage rating: 48-600 VAC
- Direct Bond Copper (DBC) Substrate
- LED input status indicator
- UL 508 Endurance Rating for Enhanced Reliability
- UL/CSA/TUV Approved, CE Compliant
- Built-in overvoltage protection
- DIN Rail or Panel Mount
- Zero voltage or Instantaneous turn-on output

### TECHNICAL DATA

#### OVERVIEW

<b>Output current</b>	25 A
<b>Output voltage</b>	48-600V ac
<b>Control voltage</b>	180-280V ac
<b>Connection</b>	Screw connection
<b>Type of control</b>	Zero voltage turn on
<b>Activation</b>	0 V

<b>Additional features</b>	Overvoltage protection built in
----------------------------	---------------------------------

## OUTPUT SPECIFICATION



<b>Output voltage</b>	48-600V ac
<b>Peak voltage</b>	1100 V
<b>Peak current</b>	130
<b>Voltage drop over semiconductor at max</b>	1.3 V
<b>Number of poles</b>	3
<b>I<sup>2</sup>t value</b>	410 A <sup>2</sup> s

## INPUT SPECIFICATION

<b>Control voltage</b>	180-280V ac
<b>Turn-off voltage</b>	10 V
<b>Input current min</b>	19 mA
<b>Input current max</b>	24 mA
<b>Response time</b>	30 ms
<b>Release time</b>	20 ms

## GENERAL SPECIFICATION

<b>Insulation voltage in/out</b>	4000 V
<b>Temperature operational min</b>	-20 °C
<b>Temperature operational max</b>	80 °C
<b>Storage temperature max</b>	100 °C
<b>Storage temperature min</b>	-40 °C
<b>Weight</b>	600 g
<b>Height</b>	91.2 mm
<b>Width</b>	90 mm
<b>Depth</b>	123.4 mm
<b>LED indication</b>	Input status indication
<b>Approvals</b>	CE, CSA, EMC, UL
<b>IP class</b>	IP20

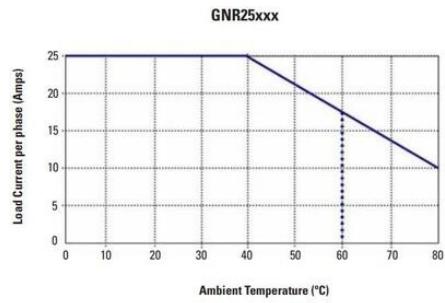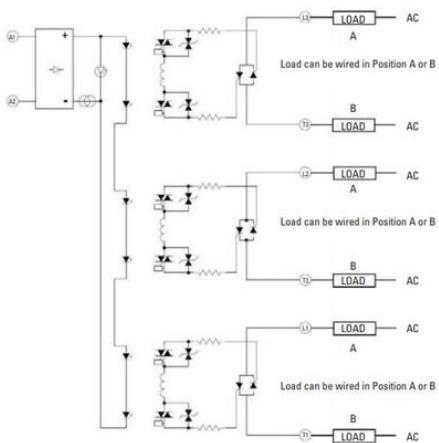

\*GNR25A Series rated to 60°C max ambient

