OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

DELCON

SLO OUTPUT RELAY FOR A LOADS

SLO24IRA
O/P Plug-in Relay 24V dc / 0-240/250V ac/dc 1.2A



- DC control/ac load
- Galvanic isolation 4kV, 8mm creep distance
- Effective interference elimination
- Compatible with NPN and PNP logic
- LED indication

PRODUCT DESCRIPTION

The relays are used as an interface between control systems and ac loads. The relays can handle inductive loads without load current reduction, which makes them very suitable for connection to, for example, solenoid valves and contactors. The relays have no mechanical parts, which means very reliable application. The integrated interference protection provides reliable operation even in very demanding electrical environments. Thanks to interference protection, signal cables can be run alongside power cables on, for example, cable racks for more than 1.5 km without capacitive cross-talk affecting relays. The SLOP models are especially designed for connection to 2-wire sensors that produce leakage current. The relays are blind to leakage currents up to 3.0 mA. For forward/reverse control of ac motors, the SLO24TRA is used. The relay has a higher operating voltage and withstands regenerated voltages from motors.

TECHNICAL DATA

INPUT DATA

Input current at nominal voltage, typ	15 mA
Input current at nominal voltage, max	17 mA
Response time	0.5 ms
Release time	11 ms
Switching voltage	16 V
Turn-off voltage	14 V
Input impedance, typ	1.4 kΩ
Input voltage nom	24


OUTPUT DATA


Number of poles	1


Load current ac max	3 A
Leakage current	50 µA
2421_Peak current (A)	90 A (20ms)
Load voltage ac max	265 V
Load voltage dc max	300 V
Voltage drop	1 V


GENERAL DATA


Width	12.5 mm
Temperature operational min	-10 °C
Temperature operational max	70 °C
Storage temperature min	-40 °C
Storage temperature max	70 °C
Material	PBT
Weight	40 g
Approvals	CE, UL

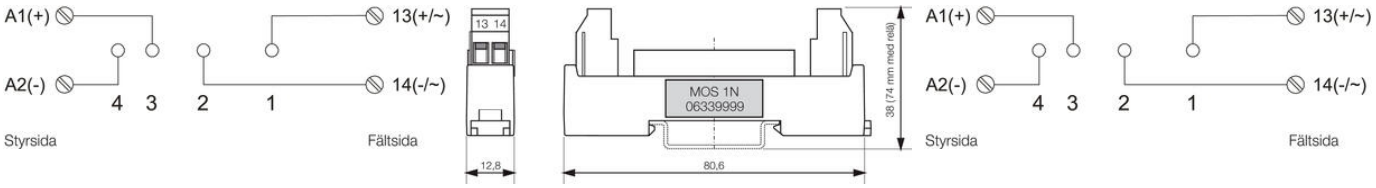

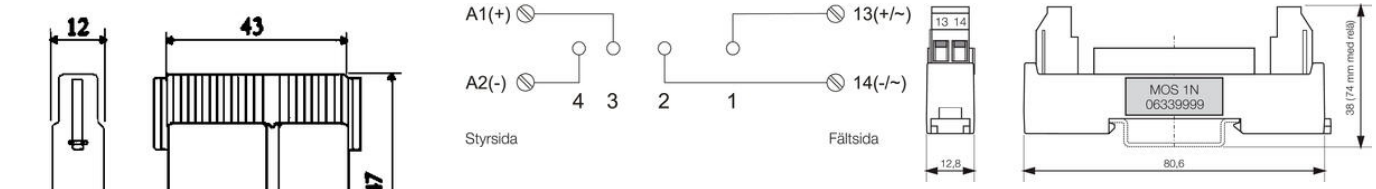

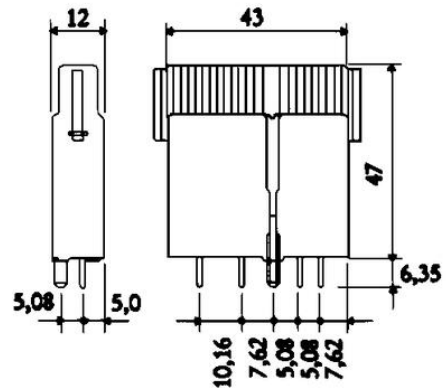

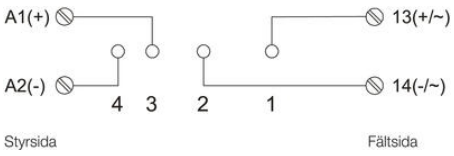

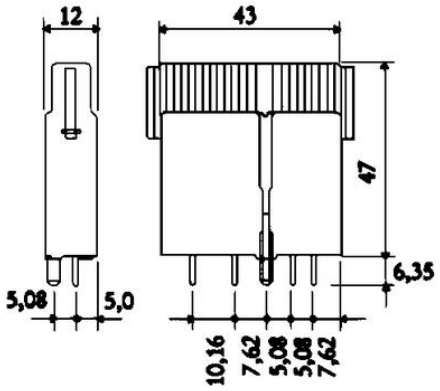
12
43
47
6,35
5,08
5,0
10,16
7,62
5,08
5,08
7,62