

CROUZET - GN SERIES SOLID STATE RELAY

Panel Mount - AC Output Single Phase

84137122N
SSR 50A 48-660 VAC Out 18-36V AC/DC In ZC

- Zero cross or instantaneous switching
- Output current: 10 - 125 Amps
- Built-in over voltage protection (zero cross only)
- LED input status indicator



PRODUCT DESCRIPTION

TECHNICAL DATA

OVERVIEW

Output current	50 A
Output voltage	48-660V ac
Control voltage	18-36V ac/dc
Mounting	Panel mount
Type of control	Zero voltage turn on

OUTPUT SPECIFICATION

Output voltage	48-660V ac
Maximum Load Current	50 A rms
Minimum Load Current	5 mA rms
Transient Voltage	1200 V pk
Maximum off-state leakage current	1 mA rms
1 Second surge current	230 A
Maximum 1 cycle surge current	700/_ (min) 750 (typ)
Maximum on-state voltage drop	1.38V
Thermal resistance junction to case	0.4 °C/W




Maximum 1/2 Cycle I ² t for fusing (A ² sec)	2450/2800
Minimum heat sink for rated current @ 40 °C	0.84 °C/W
Number of poles	1

INPUT SPECIFICATION



Control voltage	18-36V ac/dc
Minimum turn-on voltage	18V ac/dc
Must turn-off voltage	5V ac/dc
Input current min	5 mA AC / 4 mA DC
Input Current Max	10 mA
Maximum turn-on time (ms)	1/2 cycle
Maximum turn-off time (ms)	1/2 cycle

GENERAL SPECIFICATION

Dielectric strength input to output (50/60Hz)	4000 V rms
Ambient operating temperature	-40 ... +80°C
Ambient storage temperature	-40 ... +100°C
Weight	80 g
Height	59.4 mm
Width	44.5 mm
Depth	29.1 mm
Housing material	UL94 V-0
Material base	Aluminium
LED input status indicator	Green
Approvals	CE, cRUus, VDE

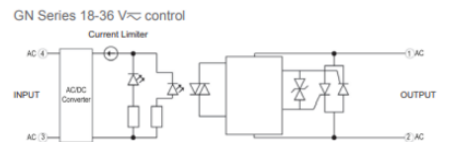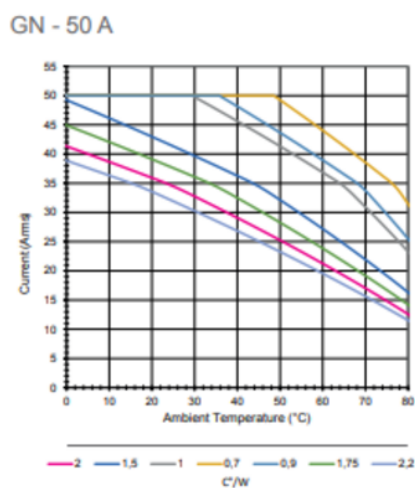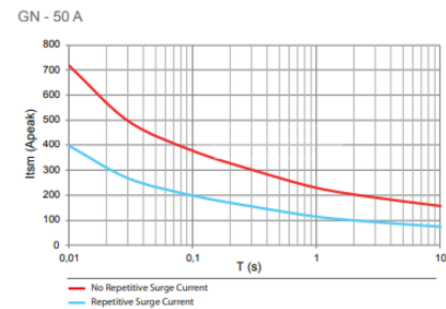

Input Voltage (V)	Input Current (mA)
0	0.0
10	4.0
20	6.2
30	5.5
40	5.2
60	5.0
80	5.0
100	5.0
150	5.2
200	5.4
250	5.6
280	5.8



① *Load*