OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

CROUZET - GND SERIES SOLID STATE RELAY

Panel Mount - DC Output

84137870N
SSR 40A 5-60 VDC Out 4-32 VDC In



- DC Switching
- Output current 10 - 40 Amps
- Built-in overvoltage protection
- LED input status indicator

PRODUCT DESCRIPTION

TECHNICAL DATA

INPUT DATA

Control voltage	4-32V dc
Must turn-off voltage	1V dc
Maximum reverse voltage	-32V dc
LED input status indicator	Green
Input Current Max	35 mA
Input current min	34 mA
Minimum turn-on voltage	3.5V dc

OUTPUT DATA


Number of poles	1
Type of control	DC Switching
Minimum Load Current	5 mA rms
Maximum Load Current	40 A rms
Maximum on-state voltage drop	1.05V pk
Maximum turn-off time (ms)	0.02
Maximum turn-on time (ms)	0.02
Maximum off-state leakage current	3 mA rms

Transient Voltage	100 V pk
Minimum heat sink for rated current @ 40 °C	115 °C/W
Output voltage	5-60V dc
Output current	40 A
Thermal resistance junction to case	9 °C/W


GENERAL DATA

Mounting	Panel mount
Width	445 mm
Depth	291 mm
Height	594 mm
Approvals	CE, cRUus
Material base	Aluminium
Housing material	UL94 V-0
Ambient operating temperature	-25 ... +90°C
Ambient storage temperature	-40 ... +100°C
Weight	80 g


GND - 40 A

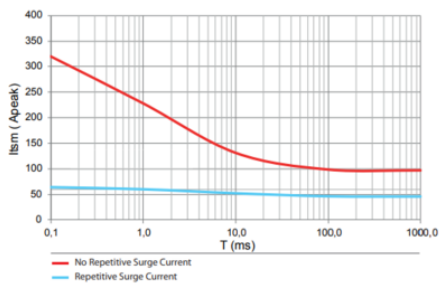


GND - 40 A

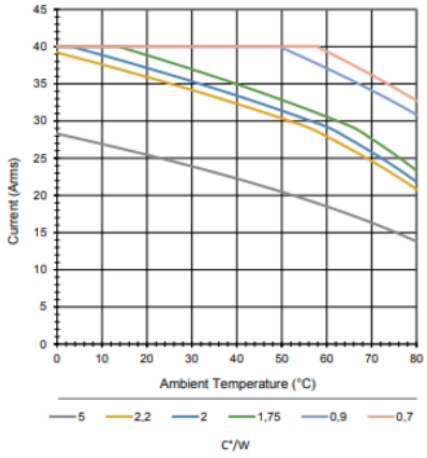


GND Series DC control without ouput protection

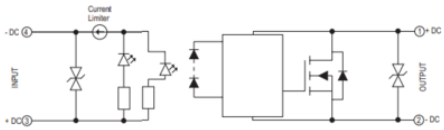

Input current vs Input Voltage
Standard Regulated DC inputs

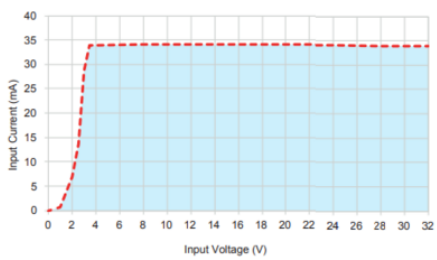


GND front view



GND side view



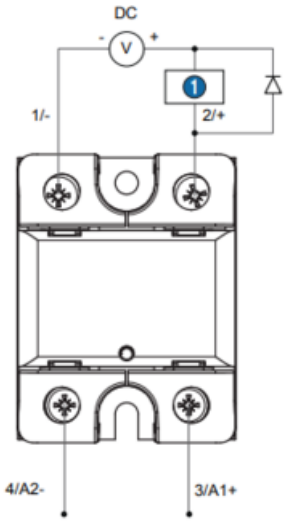

GND

1 *Load*