OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

CROUZET - GNR SERIES SOLID STATE RELAY

DIN Rail - AC output Single Phase

GNR20DCZL
SSR 20A 24-280 VAC Out 4-32 VDC In ZC



- Zero cross or instantaneous switching
- Output current 20 - 30 Amps
- Built-in overvoltage protection
- LED input status indicator

PRODUCT DESCRIPTION

TECHNICAL DATA

INPUT DATA

Control voltage	4-32V dc
Must turn-off voltage	1V dc
Maximum reverse voltage	-32V dc
LED input status indicator	Yellow
Input Current Max	14 mA
Input current min	10 mA
Minimum turn-on voltage	3V dc


OUTPUT DATA


Number of poles	1
Type of control	Zero voltage turn on
Minimum Load Current	5 mA rms
Maximum Load Current	20 A rms
Maximum on-state voltage drop	1.17V pk
Maximum 1/2 Cycle $I^2 t$ for fusing (A^2 sec)	600
Maximum turn-off time (ms)	1/2 Cycle
Maximum turn-on time (ms)	1/2 Cycle


Maximum 1 cycle surge current	270/284 (min) 340 (typ)
Maximum off-state leakage current	1 mA rms
Transient Voltage	600 V pk
1 Second surge current	95
Output voltage	24-280V ac
Output current	20 A
Thermal resistance junction to case	1.8 °C/W

GENERAL DATA


Mounting	DIN rail
Width	22.5 mm
Depth	98 mm
Height	90 mm
Approvals	CE, cRUus
Dielectric strength input to output (50/60Hz)	4000 V rms
Material base	Aluminium
Housing material	UL94 V-0
Ambient operating temperature	-40 ... +80°C
Ambient storage temperature	-40 ... +100°C
Weight	80 g

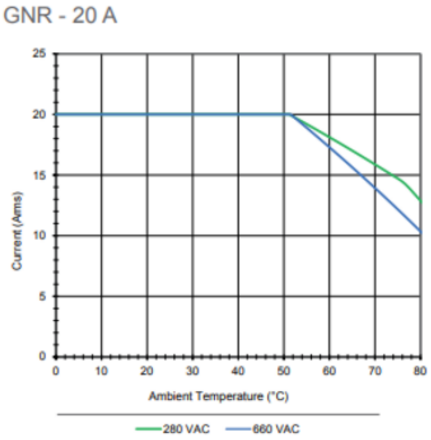

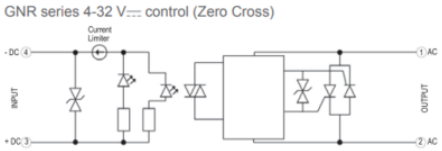


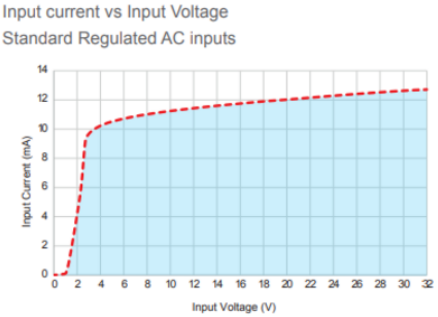


GNR - 20 A - 280 V~

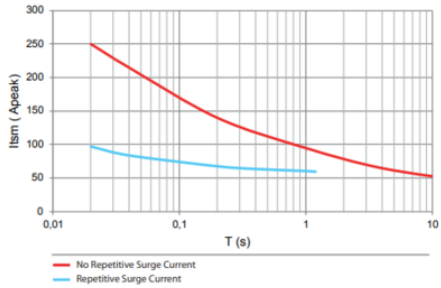


GNR

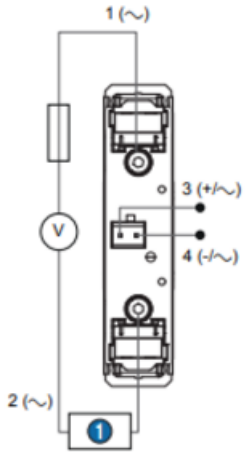

GNR front view



GNR Side view



GNR

1 *Load*